


Model 4532 Minigator Clips To BNC Male

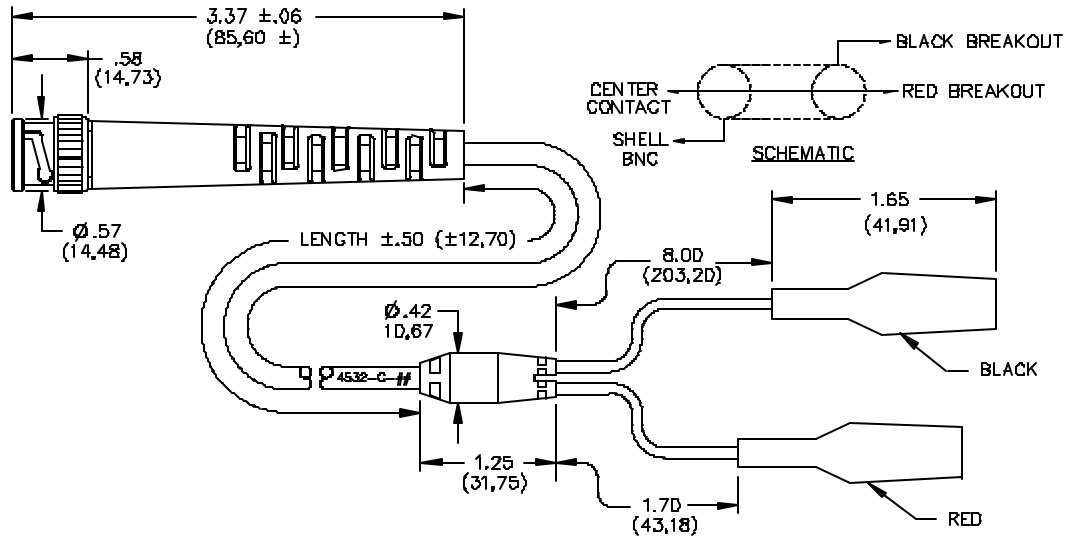

FEATURES:

- Lengths other than those specified are available upon request.

MATERIALS:

Conn: 1st End-BNC Male

Finish: Body and Fittings, Tarnish Resistant.

Nominal Impedance: 50 Ohms.

Center Contact: Gold plated per MIL-C-39012.

Molded Boot: PVC molded to cable and BNC.

Color: Black

Cable: RG58C/U. (.195) O.D.

Marking: "POMONA 4532-C-XX".

Molded Breakout: PVC molded to breakout leads and cable. Color: Black

Breakout leads: 20 AWG; 41 x 36 tinned copper.

PVC insulated 2.21 (.087) O.D.; Color matches

color of insulator. One Red and one Black.

Conn: 2nd End-Insulated Minigator Clips.

Materials: Steel.

Finish: Cadmium plated

Insulators: Vinyl

Colors: Black and Red.

RATINGS:

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 45 VRMS/DC

Current: 5 Amperes

ORDERING INFORMATION: 4532-C-XX

XX=Cable Length, Standard Lengths: 18" (457), 24" (610), 30" (762), 36" (914), 48" (1219), 60" (1524).

Ordering Example: 4532-C-60 indicates 60" (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[4532-C-60](#) [4532-C-30](#) [4532-C-48](#) [4532-C-36](#) [4532-C-24](#)