


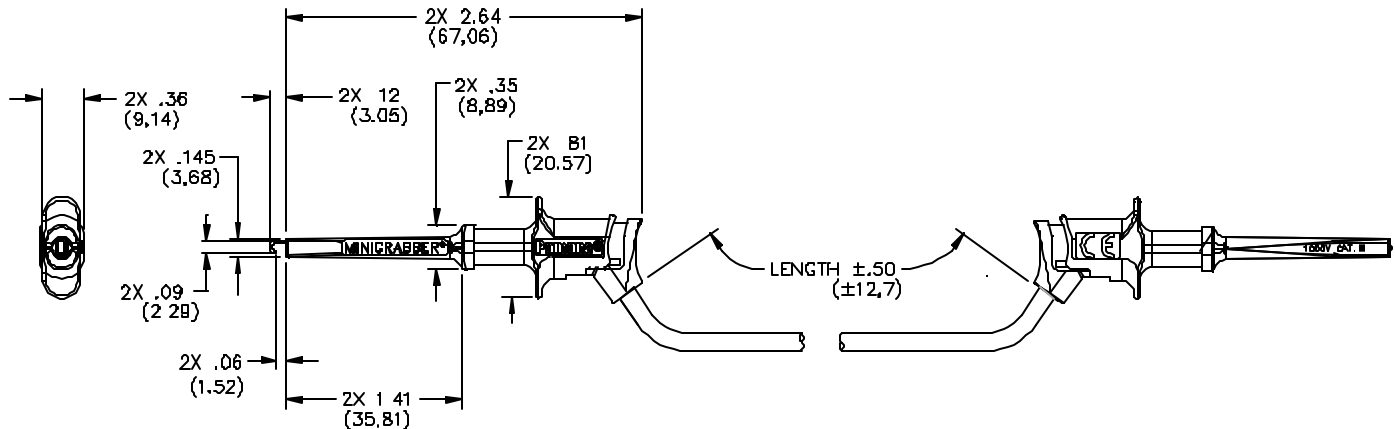

FEATURES:

- Newly designed Minigrabber® Test Clip Patch Cord offers a high 300 Volt and 5 amp rating.
- Grabber width is a slim .36" (9,14 mm) for easier access to test terminals.
- Grabber hook is gold plated Beryllium Copper to ensure signal integrity & attaches onto component leads up to .060" (1,5 mm) O.D.
- High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.

MATERIALS:

Grabber: Body: Nylon – Fire Retardant

Hook: Beryllium Copper, Gold Plated, Compression Spring: Music Wire

Wire: 18 AWG, 65 x 36 t.c., Insulation – Silicone, .144" (3,66 mm) O.D., Color per Part Number

RATINGS:

IEC 1010 2-031

Operating Voltage: 300 V, CAT II, P2

Current: 5 Amperes Max.

ORDERING INFORMATION: Model 6246-XX-*

XX = Length in Inches, Standard Lengths: 12" (305), 24" (610), 36" (914), 48" (1219), 60" (1524)

* = Color Code, -0 Black and -2 Red

Additional lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[6246-60-2](#) [6246-60-0](#) [6246-36-0](#) [6246-36-2](#) [6246-24-2](#) [6246-24-0](#) [6246-12-0](#) [6246-12-2](#) [6246-48-0](#) [6246-48-2](#)