






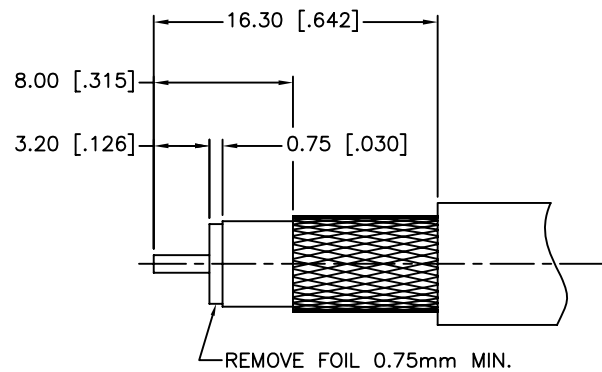


RECOMMENDED
CABLE STRIPPING DIM'S

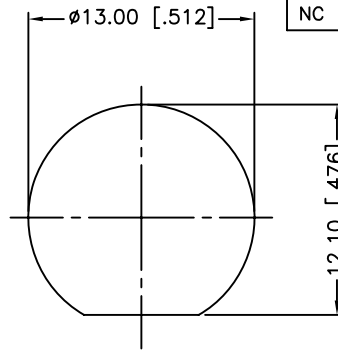

RECOMMENDED
MOUNTING HOLE

REV.	DATE	ECR NO.	DESCRIPTION
NC	01/23/10	XXXXXX	INITIAL RELEASE

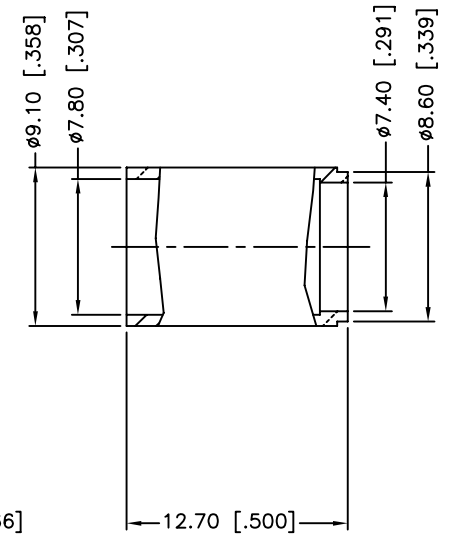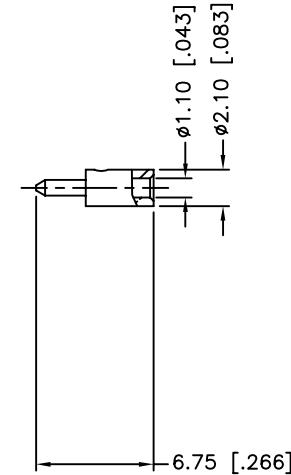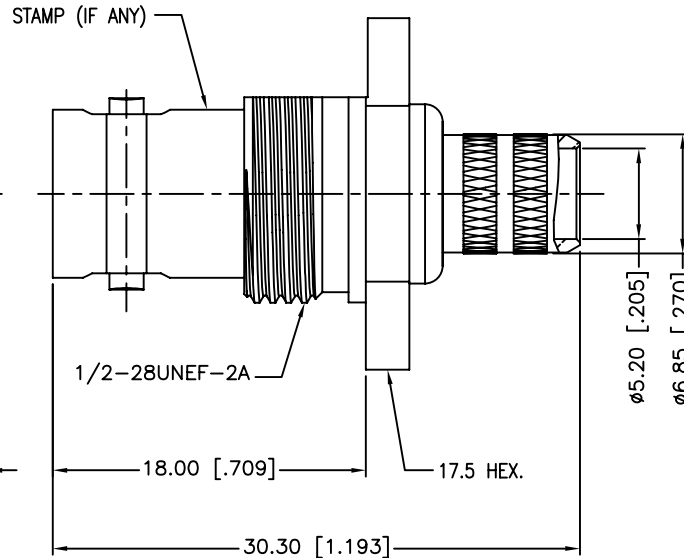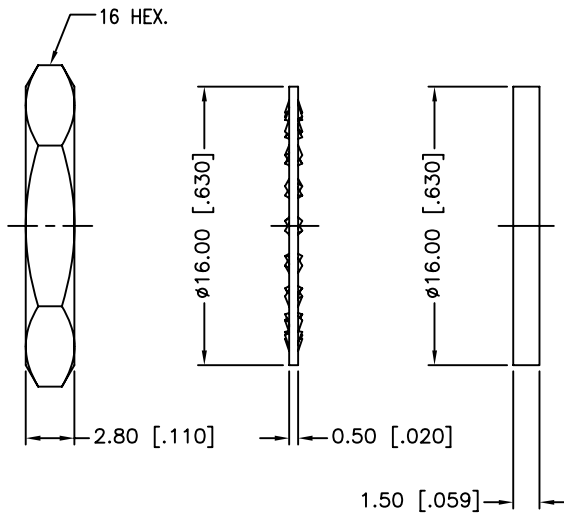

1. FREQUENCY RANGE: 0 -3 GHZ
2. VSWR: 1.15, MAX.
3. CRIMPED FERRULE
HEX CRIMP SIZE .314"
4. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
5. MAX. PANEL THICKNESS=4.5mm

9	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
8	LOCK WASHER	BRASS	NICKEL	1		DRAWN	M.ZHANG	01/23/10												
7	GASKET	RUBBER	RED	1		CHECKED														
6	FERRULE	BRASS	NICKEL	1		ISSUED														
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1		PART DESCRIPTION											
4	BARREL	BRASS	NICKEL	1							BNC BULKHEAD CRIMP JACK (FOR RG6 PLENUM/BELDEN 1694A CABLE)									
3	INSULATOR	PTFE	NATURAL	1							PART NO.									
2	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1							112662–10									
1	BODY	BRASS	NICKEL	1							DWG. NO.		112662–10.DWG		REV.	A	SIZE	A	SCALE	NA
DESCRIPTION						MATERIAL		FINISH		QTY										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112662-10](#)