
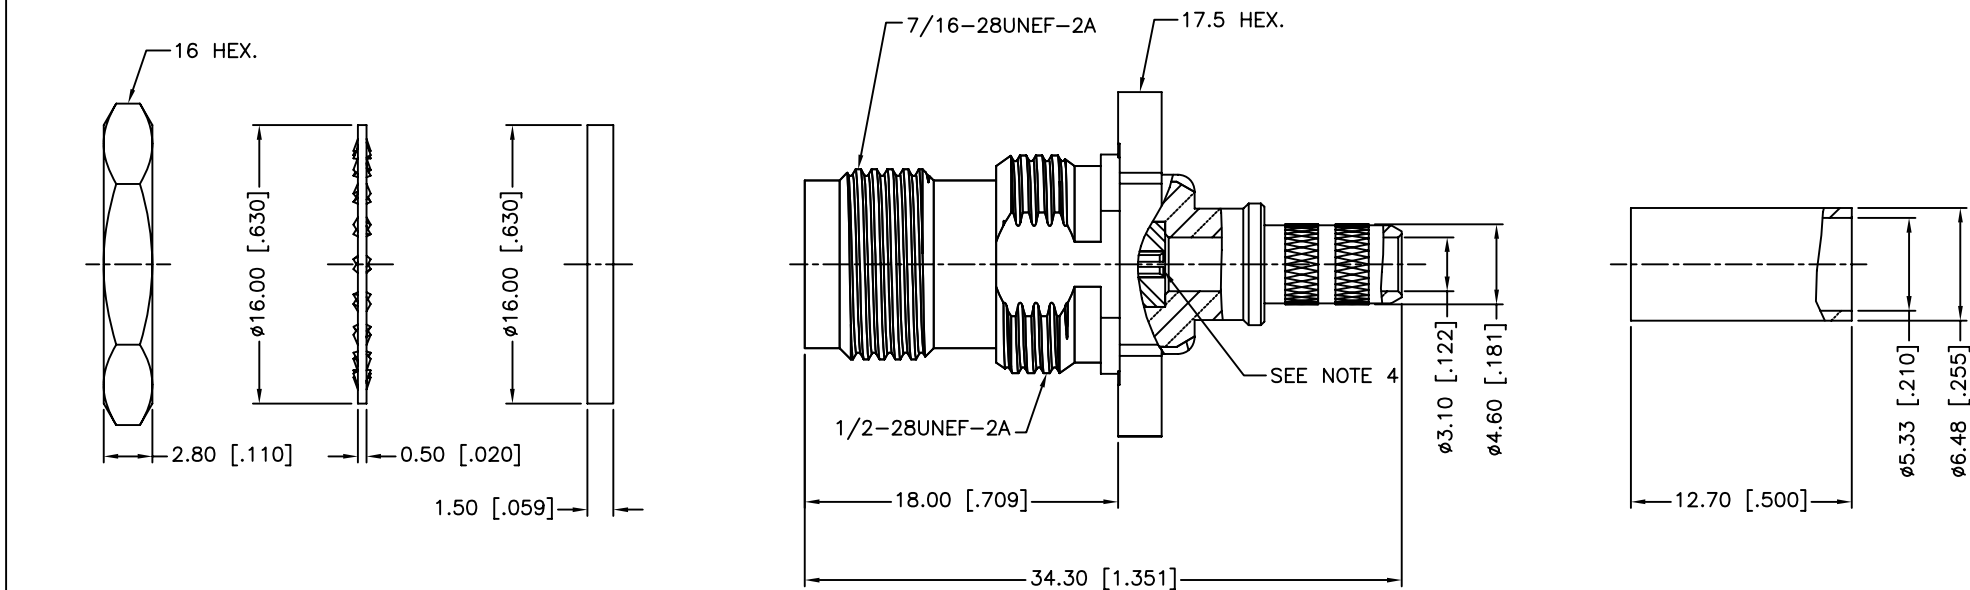
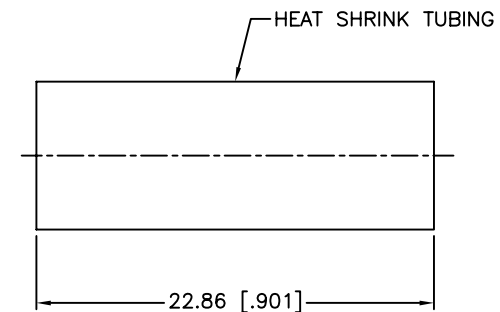


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/08/09	XXXXXX	INITIAL RELEASE

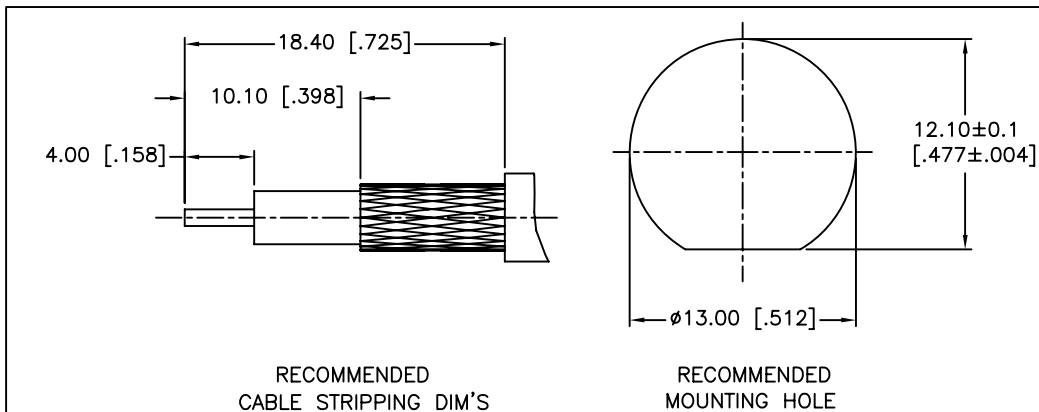

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. MAX. PANEL THICKNESS=3.5 mm
3. IP-67 COMPLIANT
4. CENTER CONTACT TO ACCEPT $\phi .033"$ TO $\phi .041"$ PIN [$\phi 0.85$ mm TO $\phi 1.05$ mm]

12	HEAT SHRINK TUBING		WHITE	1
11	HUT HEX	BRASS	NICKEL	1
10	LOCK WASHER	BRASS	NICKEL	1
9	GASKET	RUBBER	RED	1
8	FERRULE	COPPER	NICKEL	1
7	BARREL	BRASS	NICKEL	1
6	GASKET	SILICONE	RED	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	O-RING	SILICONE	RED	1
3	LOCK RING	BRASS	NICKEL	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
	DRAWN	M.ZHANG					12/08/09			
	CHECKED			PART DESCRIPTION TNC BULKHEAD CRIMP JACK, IP-67 COMPLIANT (FOR RG-58C/U CABLE)						
	ISSUED									
	SHEET	1 OF 1								
				PART NO. 122160-11						
	CAD FILE	C:/CONNEX/122160-11.DWG		DWG. NO.	122160-11.DWG	REV.	NC	SIZE	A	SCALE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122160-11](#)