


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/15/11	XXXXXX	INITIAL RELEASE

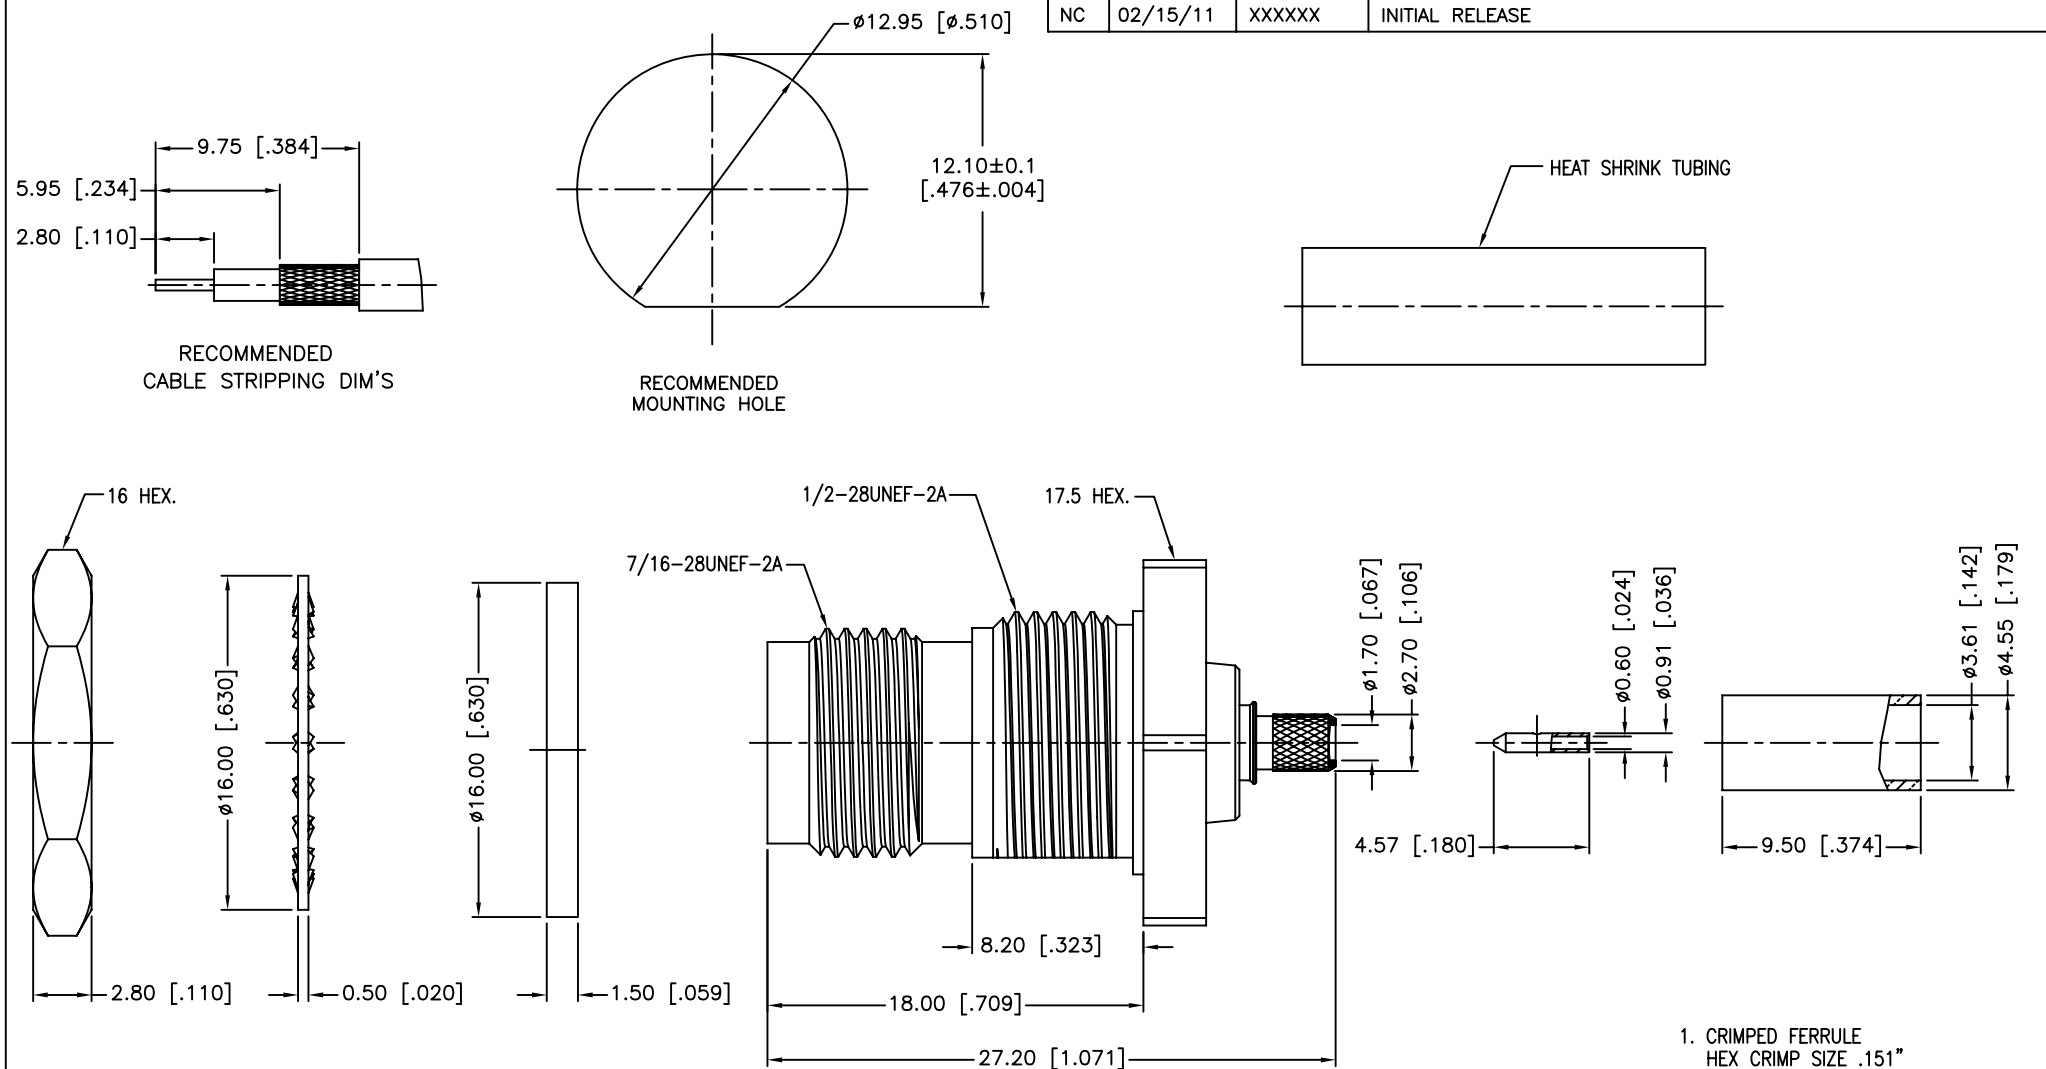

13	HEAT SHRINK TUBING		BLACK	1
12	HEX NUT	BRASS	NICKEL	1
11	LOCK WASHER	BRASS	NICKEL	1
10	GASKET	RUBBER	RED	1
9	CONTACT PIN	BRASS	GOLD	1
8	BARREL	BRASS	NICKEL	1
7	HOUSING	BRASS	NICKEL	1
6	INSULATOR	DELIRIN	NATURAL	1
5	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
4	O-RING	SILICONE	RED	2
3	LOCK RING	BRASS	NICKEL	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

SQ. CRIMP SIZE 0.7 mm OR SOLDER											
3. IP-67 COMPLIANT											
4. MAX. PANEL THICKNESS=4.2 mm											
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
	DRAWN	M.ZHANG			02/15/11						
	CHECKED			PART DESCRIPTION TNC BULKHEAD CRIMP JACK, IP-67 COMPLIANT & ISOLATED GROUND (FOR RG-316U/D CABLE)							
	ISSUED										
	SHEET	1 OF 1									
				PART NO. 122543							
	CAD FILE	C:/CONNEX/122543.DWG		DWG. NO.	122543.DWG	REV.	NC	SIZE	A	SCALE	NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122543](#)