


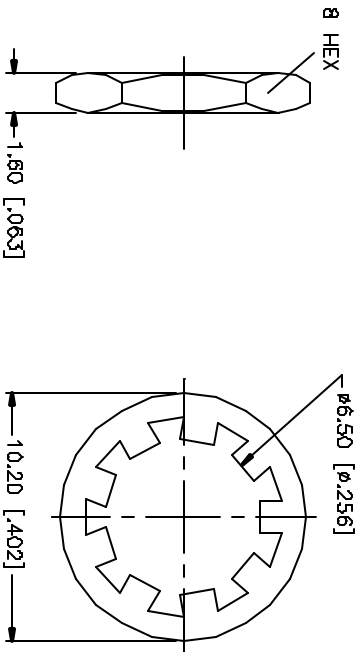


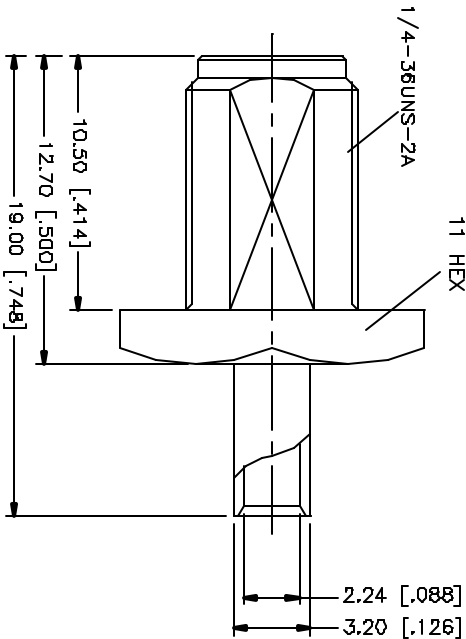


REV.	DATE	DESCRIPTION
NC	08/25/04	INITIAL RELEASE



RECOMMENDED CABLE STRIPPING DIMS.



NOTE:
1. CONTACT PIN TO SOLDER.
2. MAX. PANEL THICKNESS = 2.4mm

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR OUTLINE REFERENCE ONLY.		TOLERANCES FOR MILLIMETERS ARE:		TOLERANCES FOR INCHES ARE:	
8	FERRULE	BRASS	GOLD		
7	LOCK WASHER	BRASS	GOLD		
6	GASKET	SILICONE	RED		
5	INSULATOR	TEFLON	NATURAL		
4	CONTACT PIN	BRASS	GOLD		
3	INSULATOR	TEFLON	NATURAL		
2	BODY	BRASS	GOLD		
1	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING
DRAWN		G.R.S.		08/25/04	
CHECKED					
SHEET		1 OF 1			
PART NO.		132105RP			
DWG. NO.		132105RP.DWG			
REV.		NC			
SIZE		A			
SCALE		NA			

Amphenol Connex

SMA DIRECT SOLDER BULKHEAD JACK
(FOR .085" , .086" REVERSE POLARITY)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[132105RP](#)