








REV.	DATE	DESCRIPTION
A	04/03/05	UPDATE DRAWING FORMAT

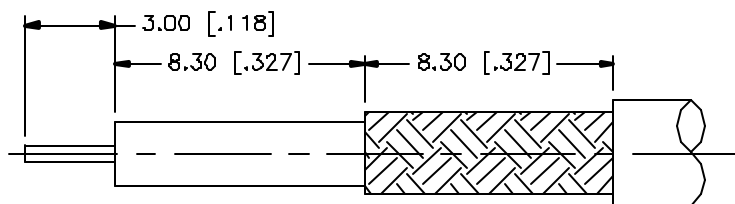

RECOMMENDED CABLE STRIPPING DIM'S

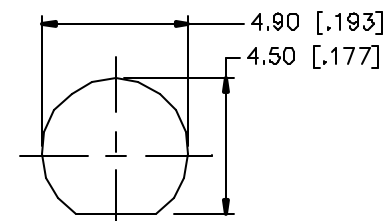

RECOMMENDED
MOUNTING HOLE

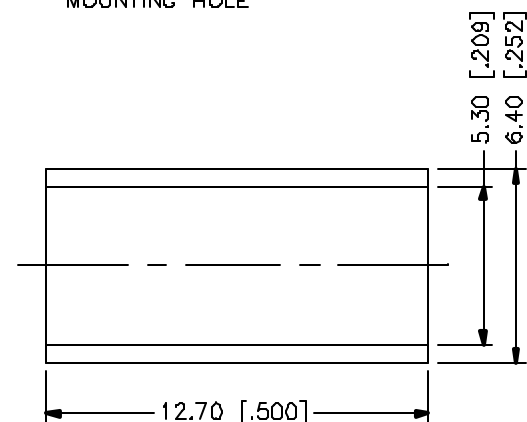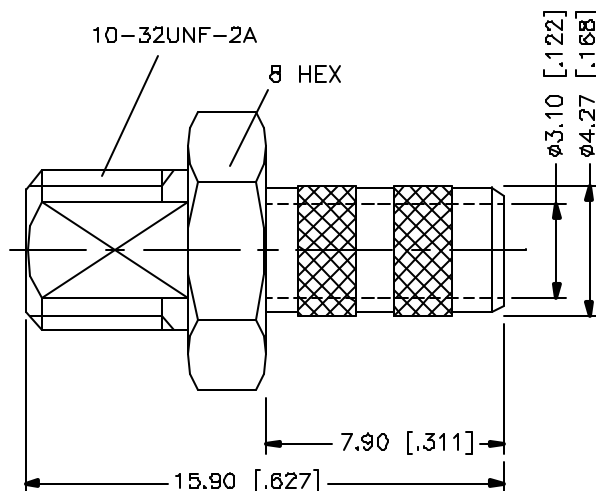

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.					04/03/05			
7						CHECKED			PART DESCRIPTION BULKHEAD CABLE TERMINATION (FOR RG-58C/U, 58/U CABLE)						
6						ISSUED									
5	FERRULE	COPPER	NICKEL	1		SHEET	1 OF 1		PART NO. 142271						
3	HEX NUT	BRASS	NICKEL	1	CAD FILE	C:/142/2142271.DWG		DWG. NO.					142271	REV.	A
2	LOCK WASHER	BRASS	NICKEL	1	DO NOT SCALE DRAWING										
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[142271](#)