


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/15/10	XXXXXX	INITIAL RELEASE

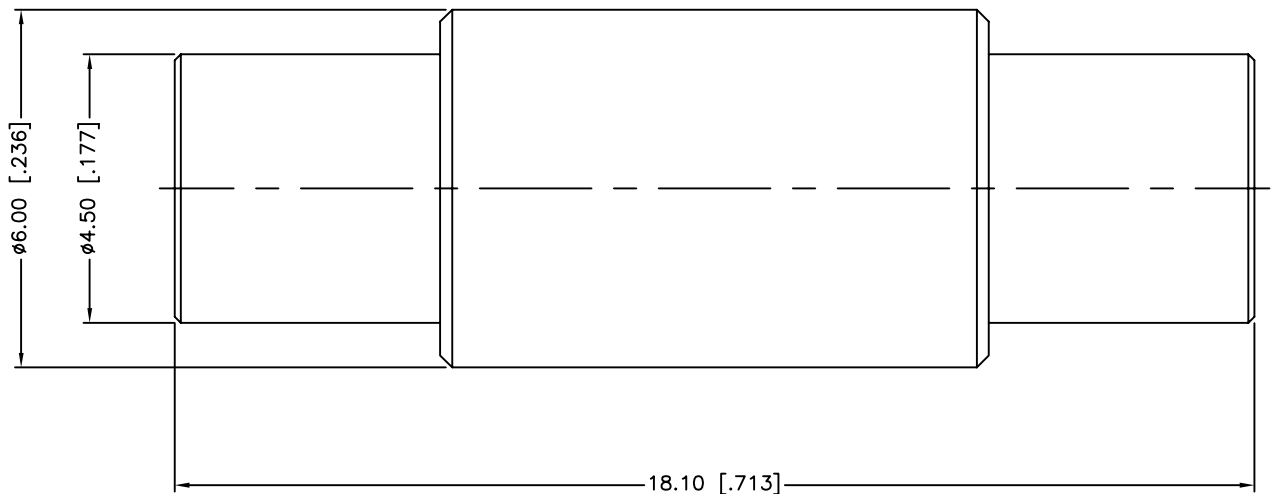

1. FREQUENCY RANGE: DC 0–2.5 GHz
2. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex PART DESCRIPTION MCX JACK TO JACK ADAPTOR – 75 ohm PART NO. 252169–75 DWG. NO. 252169–75.DWG REV. NC SIZE A SCALE NA						
					DRAWN		M.ZHANG							06/15/10	
					CHECKED										
					ISSUED										
					SHEET		1 OF 1								
3	CONTACT PIN	BERYLLIUM COPPER	GOLD	1	CAD FILE		C:/CONNEX/252169–75.DWG								
2	INSULATOR	PTFE	NATURAL	1											
1	BODY	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[252169-75](#)