



RoHS Compliant

Features

- Distributed constant type LC filter. Prevents ringing caused by circuit impedance. Suitable for high speed digital circuits and video signal lines.
- Stable noise attenuation over wide frequency ranges.
- Low profile (T=0.95mm max.) suitable for miniature electronic equipments.
- First class auto-placement

Applications

- PCs, Laser Printers, Cellular Phone, Clock Data Lines for LCD Display
 - High Speed Video Signal Circuits and Interface Circuits
 - High Speed Digital Circuits
 - Anti-Noise Solution
- Achieves Effective Noise Suppression in Noisy High Speed Circuits without Signal Waveform Distortion

How to Order

KNF 21 050 - W 3
 ① ② ③ ④ ⑤

① Series

② Size EIA (EIAJ)
 21 :0805 (2012)

③ Frequency

025	25MHz	200	200MHz
050	50MHz	400	400MHz
100	100MHz		

④ Taping Direction (See Fig 1)


W: Standard

⑤ Quantity per Reel

3	3000pcs.
---	----------

Dimensions

(Unit : mm)

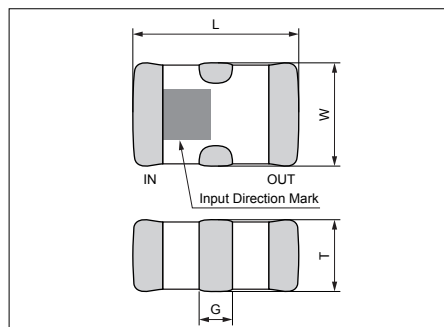



	KNF21
L	2.0±0.2
W	1.25±0.2
T	0.8±0.15
G	0.4±0.3

Specifications

Part Number	Cut off Freq. (MHz)	Capacitance (+50/-20%) (pF)	20dB Attenuation (Typical)	Rated current(mA)	Rated voltage(VDC)
KNF21025	25MHz	235pF	200- 600MHz	150mA	25VDC
KNF21050	50MHz	130pF	350- 850MHz		
KNF21100	100MHz	65pF	450- 950MHz		
KNF21200	200MHz	33pF	700-1200MHz		
KNF21400	400MHz	17pF	900-1400MHz		

*Cut off Frequency at Attenuation typical 3dB, max. 6dB
 Operating Temperature: -25 to 85(°C)


Frequency Characteristics

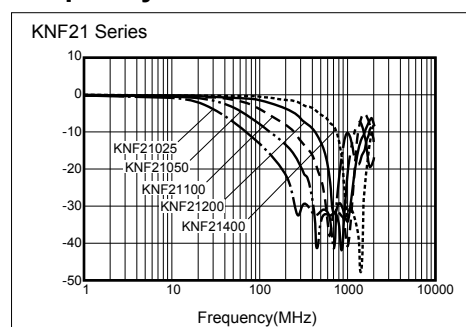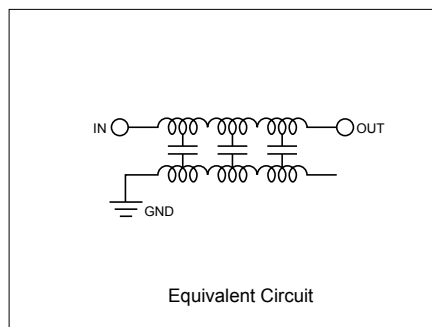


<Impedance Matching Free>

- Stable attenuation against impedance change
- Good impedance matching without ringing on distortion even at the time of IC ON/OFF and pattern layout change

Test circuit

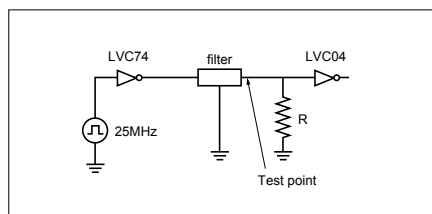


Output Waveform (Clock frequency 25MHz)

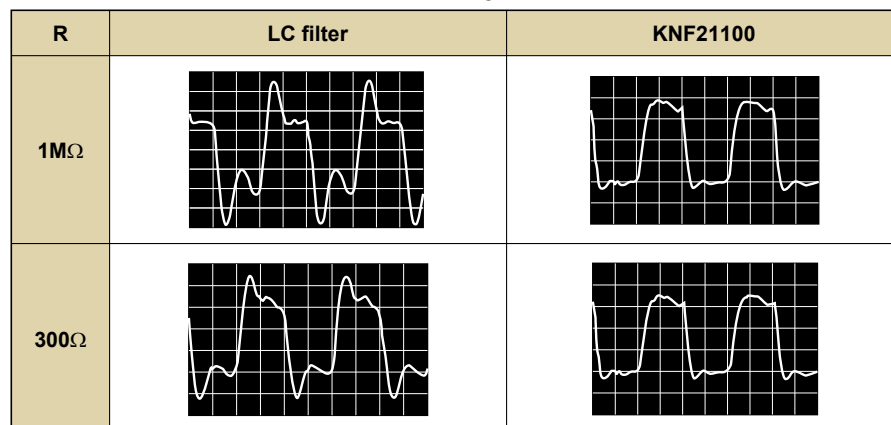

<No Ringing>



Excellent Impedance Matching

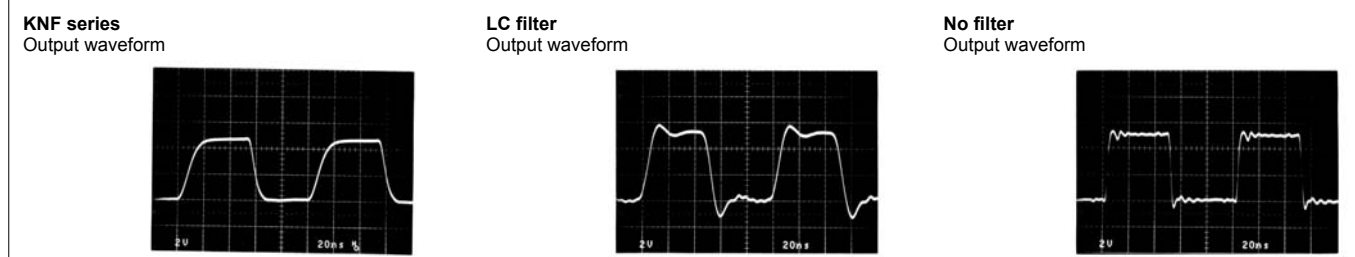

- Wide attenuation up to high frequency range without distortion


Wide Attenuation Bandwidth

Test Circuit

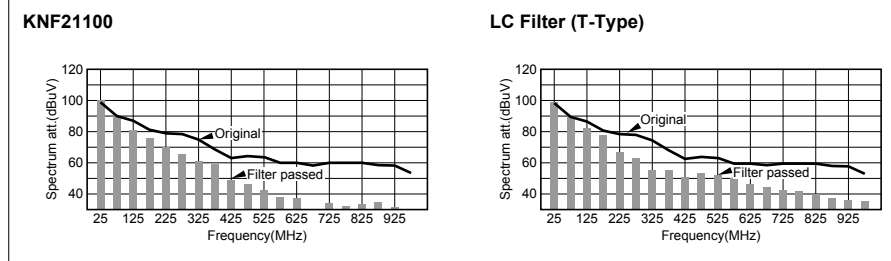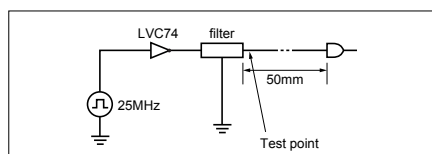

Recommended Land Pattern

(Unit : mm)

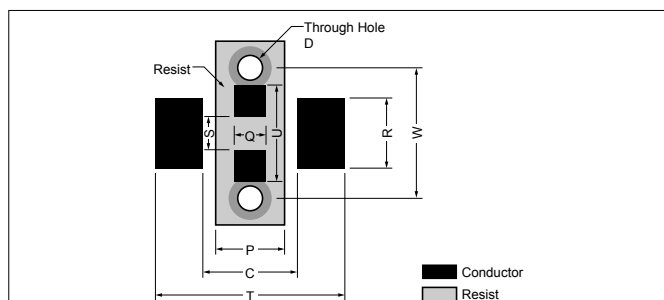



	T	W	R	C	P	Q	S	D	U
KNF21	3.20	2.30	1.00	1.20	0.80	0.40	0.60	0.3-0.4	2.00

Packaging Specification (Fig.1)

- Taping (3,000/reel)

(Unit : mm)

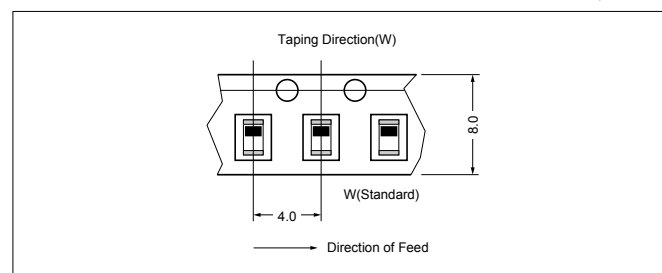

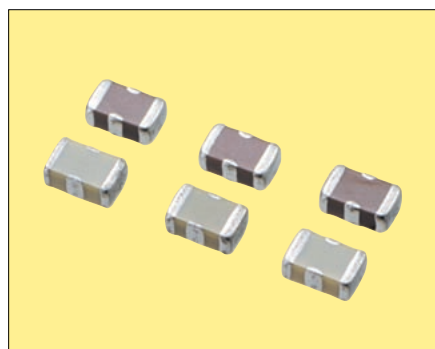
Pb Free
RoHS Compliant

Features

- 0805 Size. Rated current up to 2A.
- Effective for filtering noise on power (Vcc) lines.

Applications

- PCs, Laser Printers, Cellular Phone, Power/Signal Lines for LCD Display, Office Equipments
- AV Power Supply/Signal Line, TV, VCR, etc.
- High Current Signal Lines

How to Order

KNH 21 104 - 3 AA
① ② ③ ④ ⑤

① Series

② Size EIA (EIAJ)
21: 0805 (2012)

③ Capacitance Value

104	100nF	101	100pF
473	47nF	470	47pF
471	470pF	220	22pF
221	220pF		


④ Quantity per Reel

3 3000pcs.

⑤ Code (AA : STD)

Dimensions

(Unit : mm)

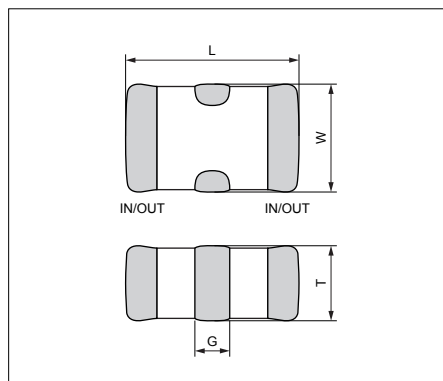


	KNH21
L	2.0±0.2
W	1.25±0.2
T	0.85±0.15
G	0.40±0.30

Specifications

Type	Capacitance Value(pF) (+50/-20%)	Rated Current (A)	Rated Voltage (VDC)	Direct-current resistance(Ω)
KNH21104	100,000	2.0	25	≤0.02
KNH21473	47,000	2.0	50	≤0.02
KNH21471	470	1.0	50	≤0.08
KNH21221	220	1.0	50	≤0.08
KNH21101	100	1.0	50	≤0.08
KNH21470	47	1.0	50	≤0.08
KNH21220	22	1.0	50	≤0.08


Operating Temperature: -25 to 85(°C)

Attenuation Characteristics

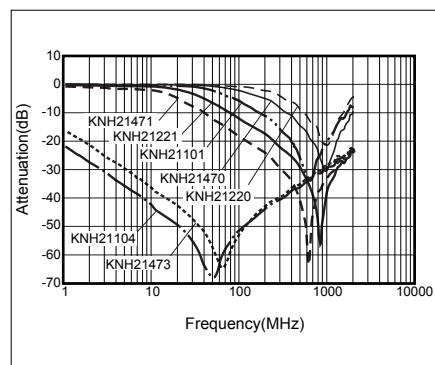

Recommended Land Pattern


(Unit : mm)

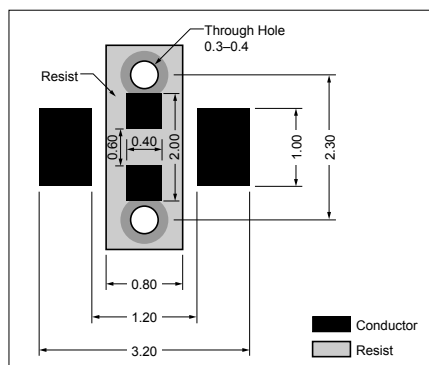

Packaging specifications

- Taping (3000/reel)


(Unit : mm)

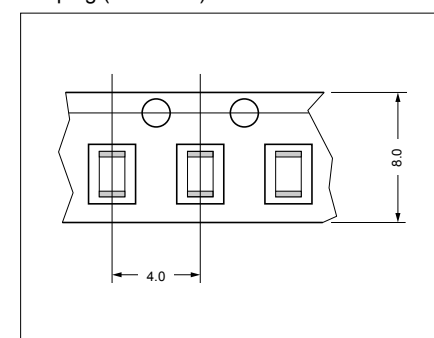


<Electrical Characteristics>

- Wide attenuation range including surrounding circuit.

Test Circuit

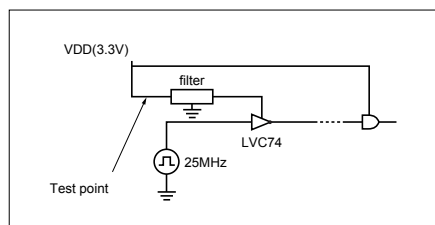

Attenuation Effect of Power Supply Noise

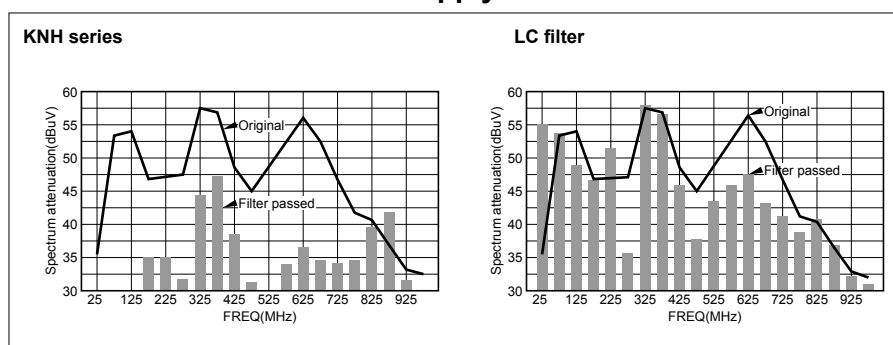

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[KNF21025-W3](#)