

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: 2.0 to 18.0 GHz
- 1.2 INSERTION LOSS: $(0.4+0.04*f)$ dB MAX,
WHERE f IS FREQUENCY IN GHz.
- 1.3 ISOLATION: 15dB MIN.
- 1.4 VSWR (MAX): 1.50:1
- 1.5 OUTPUT UNBALANCE:
 - 1.5.1 AMPLITUDE: 0.30dB MAX.
 - 1.5.2 PHASE: 5° MAX.
- 1.6 MAXIMUM INPUT POWER: 3 WATTS

- 3.0 MARKING: MARK UNIT AS SHOWN
(SLK-08092-82-03)
- 4.0 DIMENSIONS IN PARENTHESIS ARE
IN MILLIMETERS.

2.0 FINISHING

GREY OVER MIL-E-15090 TYPE II, CLASS 2
OVER MIL-C-5541 CLASS 3A
MEETS MIL-F-14072
MEETS MIL-E-5400

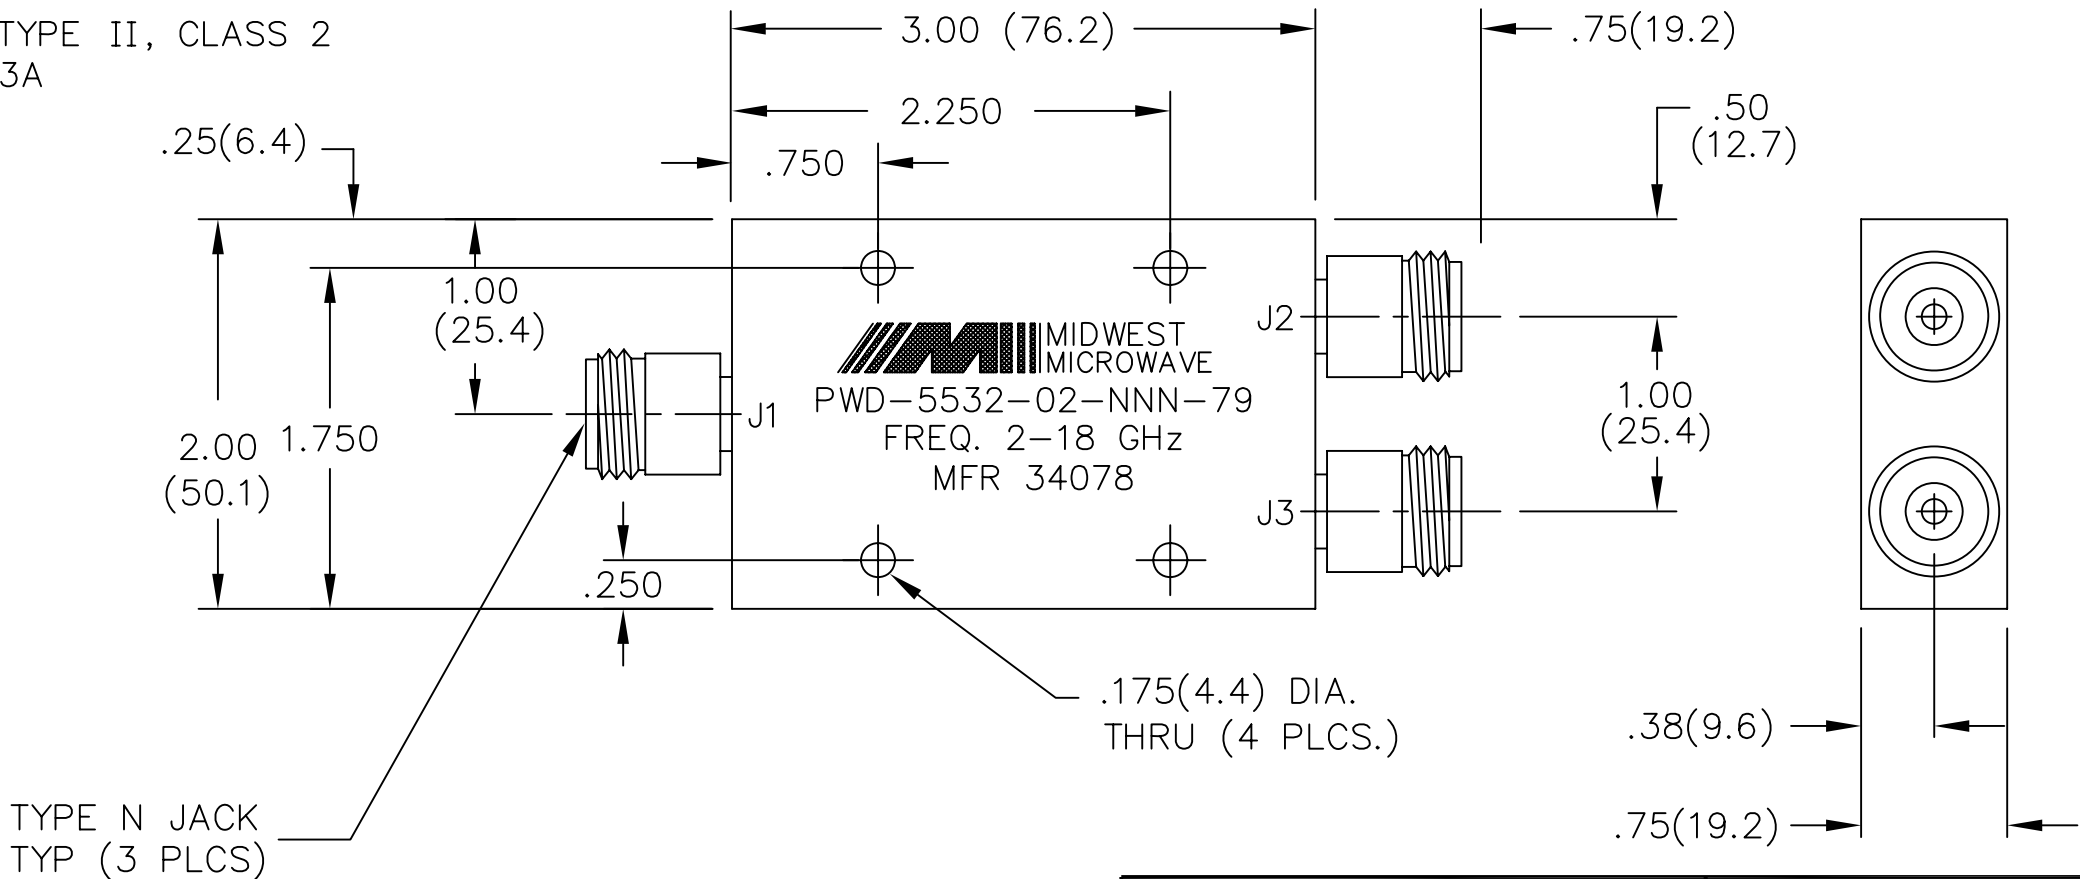

REV.	DESCRIPTION	DATE
-	RELEASED	3/13/95
A	ECN 16826	9/4/98
B	ECN 16924	12/4/98
C	ECN 17092	4/23/99
D	ECN 20249	12/17/04

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		FSCM NO. 34078	MIDWEST MICROWAVE	
		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE POWER DIVIDER
DRAWN/DATE A.BEATTY 3/2/95		ENG./DATE J.O'NEIL 3/13/95	DRAWING NUMBER PWD-5532-02-NNN-79	
CHECKED/DATE P.GOODMAN 3/6/95		APPROVED/DATE	SCALE: 1=1	SHEET 1 of 1

MODEL NUMBER	REV.
PWD-5532-02-NNN-79	D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[PWD-5532-02-NNN-79](#)