

4

3




2

1

used for:

D-SUB FILTER

POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	25.00 $^{+0.12}_{-0.13}$	242A26820X
15	39.52	24.79	33.30 $^{+0.15}_{-0.1}$	242A26830X
25	53.42	38.50	47.04 ± 0.13	242A26840X
37	69.70	54.96	63.50 ± 0.13	242A26850X

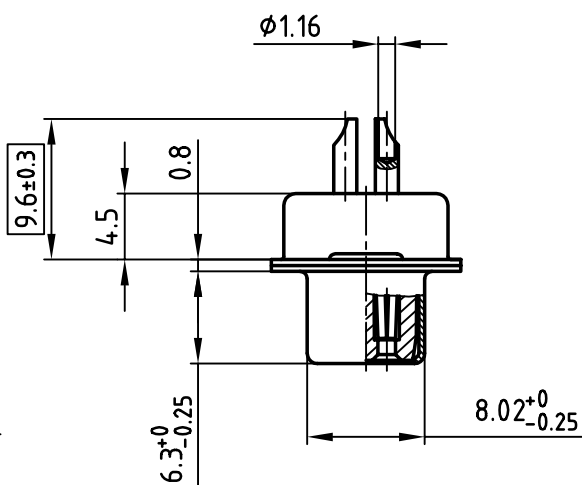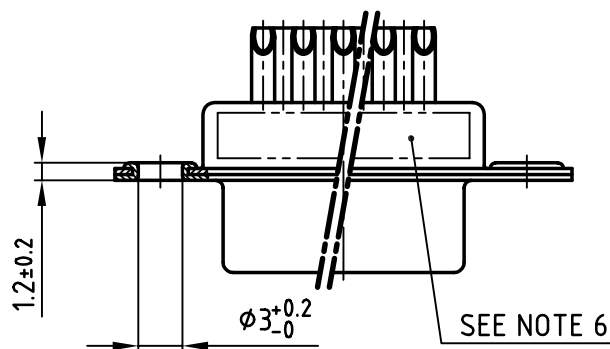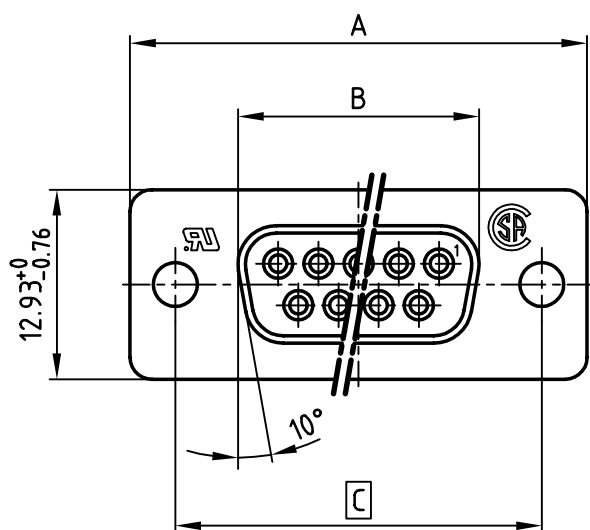

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
SOLDER CUP ACCEPTS CABLE AWG 20
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
- CAPACITANCE: 830pF $\pm 20\%$
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CRITICAL DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2002	date	name	
				drawn	18.06.	Parei	
				appd.	18.06.	E. Mickenbecker	
				norm	DIN 41652		
				d-old			
							
rev.	description	date	name				

title:		D-SUB FILTER FEMALE 9-37pos. SOLDER CUP	
dwg no:		AutoCAD 2000	DIN-A
part no:		24K1A270	4
		SEE TABLE	sh: 1/1

4

3

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[242A26840X](#)