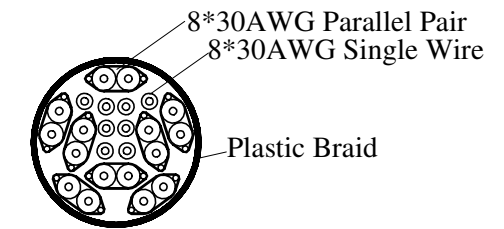
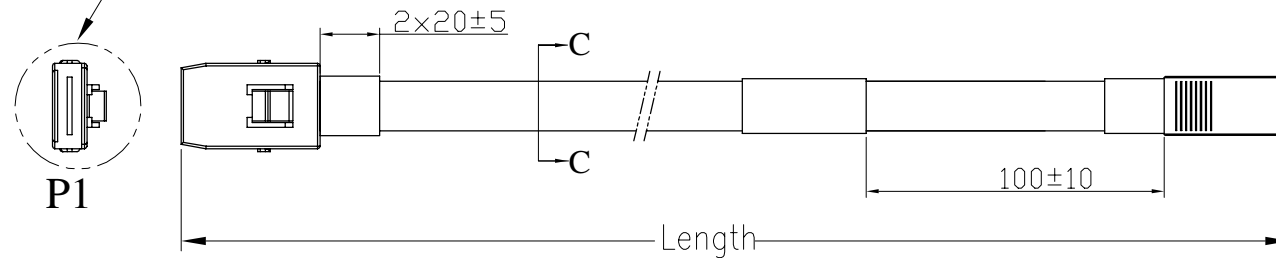
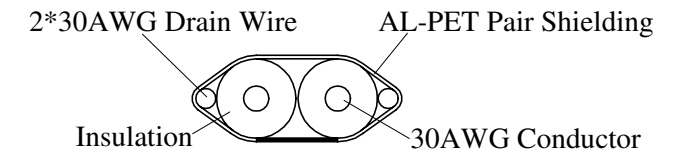
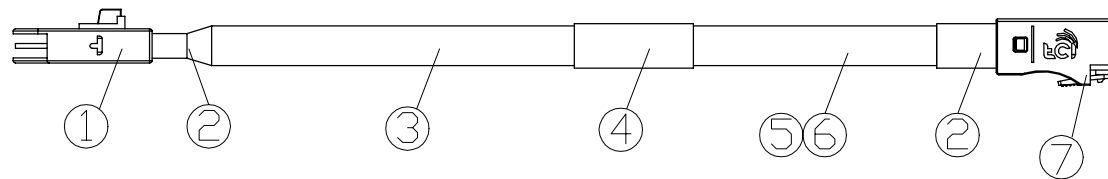
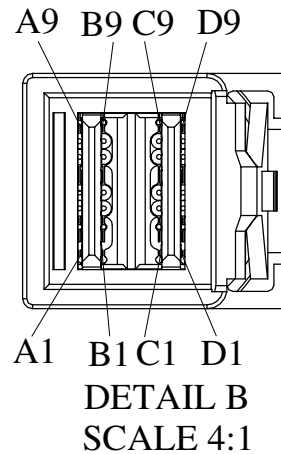
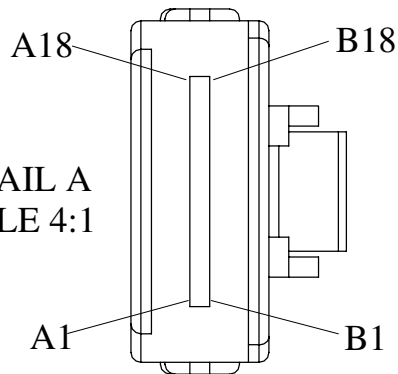


SEE DETAIL A


SEE DETAIL B

Cross Section C-C
SCALE 6:1Parallel Pair Unit
SCALE 20:1DETAIL A
SCALE 4:1

NOTES:

- 100% CONTINUITY TESTED AS DEFINED IN WIRE DIAGRAM.
- HI-POT TEST: DC 300V/10ms
CONNECTION RESISTANCE: 3.0 Ohm MAX.
INSULATION RESISTANCE: 10M Ohm MIN.
- ROHS COMPLIANCE
- PACKAGE SPECIFICATION REFER TO GS-14-1274.
- A SYMBOL  WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION

7	1	EA	HD miniSAS CONNECTOR KIT
6	A/R	MM	30AWG DISCRETE SINGLE WIRE FOR SIDEBAND SIGNAL
5	A/R	MM	30AWG PARALLEL PAIR 100 ohms DIFFERENTIAL CABLE, AL-PET+2*30AWG DRAIN WIRE zygomorphic FOR SHIELDING
4	1	EA	CABLE LABEL, BRIGHT WHITE
3	A/R	MM	PLASTIC BRAID, BLACK COLOR
2	A/R	MM	AC fabric tape or HS tube, BLACK COLOR
1	1	EA	miniSAS STRAIGHT CONNECTOR KIT
ITEM	Q'TY	UNIT	DESCRIPTION

www.fciconnect.com			surface -	tolerance std -	projection	MM	
			TOLERANCES UNLESS OTHERWISE SPECIFIED			size A3	
Dr	Andy Wu	2012-11-15	ANGULAR	0.X			
Eng	Andy Wu	2012-11-15		0.XX			
Chr	Roger Cheng	2012-11-15	0° ±'	0.XXX	ECN		-
Appr	Jackson Wang	2012-11-15	Product family			Spec ref	
			Internal miniSASHD to internal miniSAS ST cable assembly			10120612	
			catalog no	-	CUSTOMER		sheet 1 of 2

WIRE DIAGRAM:

P1 BACKPLANE			P2 CONTROLLER	
PIN	SYMBOL		SYMBOL	PIN
B18	GND	-----	GND	A9
B17	Tx3-	○→	Rx3-	A8
B16	Tx3+	○→	Rx3+	A7
B15	GND	-----	GND	B9
B14	Tx2-	○→	Rx2-	B8
B13	Tx2+	○→	Rx2+	B7
B12	GND	-----	GND	B6
B11	SB 5	←→	SB 5	D1
B10	SB 4	←→	SB 4	C1
B9	SB 3	←→	SB 3	B1
B8	SB 7	←→	SB 7	A1
B7	GND	-----	GND	A6
B6	Tx1-	○→	Rx1-	A5
B5	Tx1+	○→	Rx1+	A4
B4	GND	-----	GND	A3
B3	Tx0-	○→	Rx0-	B5
B2	Tx0+	○→	Rx0+	B4
B1	GND	-----	GND	B3
A18	GND	-----	GND	C9
A17	Rx3-	←○	Tx3-	C8
A16	Rx3+	←○	Tx3+	C7
A15	GND	-----	GND	D9
A14	Rx2-	←○	Tx2-	D8
A13	Rx2+	←○	Tx2+	D7
A12	GND	-----	GND	D6
A11	SB 6	←→	SB 6	D2
A10	SB 2	←→	SB 2	C2
A9	SB 1	←→	SB 1	B2
A8	SB 0	←→	SB 0	A2
A7	GND	-----	GND	C6
A6	Rx1-	←○	Tx1-	C5
A5	Rx1+	←○	Tx1+	C4
A4	GND	-----	GND	C3
A3	Rx0-	←○	Tx0-	D5
A2	Rx0+	←○	Tx0+	D4
A1	GND	-----	GND	D3

TABLE 1:

CUSTOMER P/N	FCI P/N	REVISION	WIRE GAUGE	LENGTH("L")	TOLERANCE
TBD	10120612-2020LF	A	30AWG	200 mm	±15mm
TBD	10120612-2030LF	A	30AWG	300 mm	±15mm
TBD	10120612-2040LF	A	30AWG	400 mm	±15mm
TBD	10120612-2050LF	A	30AWG	500 mm	±15mm
TBD	10120612-2060LF	A	30AWG	600 mm	±15mm
TBD	10120612-2070LF	A	30AWG	700 mm	±15mm
TBD	10120612-2080LF	A	30AWG	800 mm	±15mm
TBD	10120612-2090LF	A	30AWG	900 mm	±15mm
TBD	10120612-2100LF	A	30AWG	1000 mm	±20mm

CABLE LABEL SPEC.:

FCI CHINA
10120612-2100LF
REV. A
12/04/25-0001

WHITE

CLEAR

LABEL NOTES:

A. FCI PN and Revision: see table 1

B. 12/04/25-0001

SN: SERIAL NUMBER

DD: DATE

MM: MONTH

YY: YEAR

C. SN: START FROM 0001...

WHICH COULD NOT BE REPEAT.

rev	ecn no	dr	date

www.fciconnect.com			surface - - ✓ -		tolerance std - -		projection 		MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	Andy Wu	2012-11-15	ANGULAR	LINEAR	0.X	±-	size A3	Scale NTS		
Eng	Andy Wu	2012-11-15			0.XX	±-				
Chr	Roger Cheng	2012-11-15			0° ±°	0.XXX			±-	
Appr	Jackson Wang	2012-11-15	Product family					ECN	-	
								Spec ref	-	
		title	Internal miniSASHD to internal miniSAS ST cable assembly				dwg no 10120612	Rev. A		
			catalog no -							
						CUSTOMER	sheet 2 of 2			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10120612-2050LF](#) [10120612-2100LF](#) [10120612-2060LF](#) [10120612-2070LF](#) [10120612-2040LF](#) [10120612-2030LF](#)
[10120612-2080LF](#) [10120612-2090LF](#)