


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0676432910**  
**Status:** **Active**  
**Overview:** USB Products and Solutions  
**Description:** Universal Serial Bus (USB) Shielded I/O Receptacle, Right-Angle, Type A, High-Temperature Black Nylon, Gold (Au) Flash, PCB Thickness 1.60mm, without Upper Flange, for IR Reflow Process, Lead-Free

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-67643-002 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-67643-002-001 (PDF)</a>
<a href="#">Product Specification PS-67643-002-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

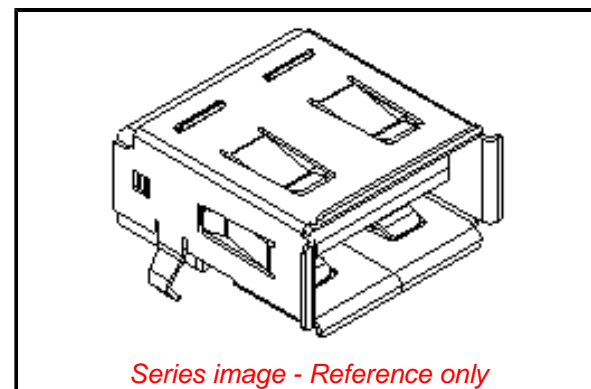

**Agency Certification**

UL E29179

**General**

Product Family	I/O Connectors
Series	67643
Application	Wire-to-Board
Comments	Without Upper Flange For IR Reflow Process, Without Upper Flange For IR Reflow Process
Component Type	Receptacle
Overview	<a href="#">USB Products and Solutions</a>
Product Name	USB 2.0
Type	A
UPC	822350071611

**Physical**

Circuits (Loaded)	4
Circuits (maximum)	4
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	1.860/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.60mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Panel Mount	Yes
Pitch - Mating Interface	2.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	1.5A
Shielded	Yes
Voltage - Maximum	30V

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	003
--	-----

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

67643 Series

**Mates With**

USB Type A Plug

Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-67643-002
Product Specification	PS-67643-002-001
Sales Drawing	SD-67643-003
Test Summary	TS-67643-002-001

This document was generated on 10/15/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[67643-2910](#)