
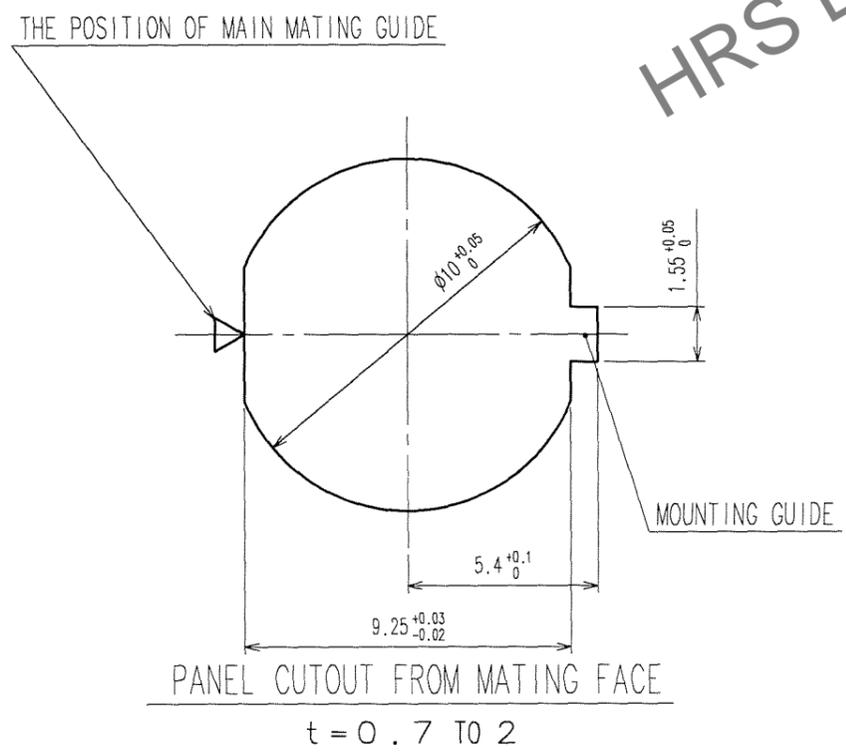


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					

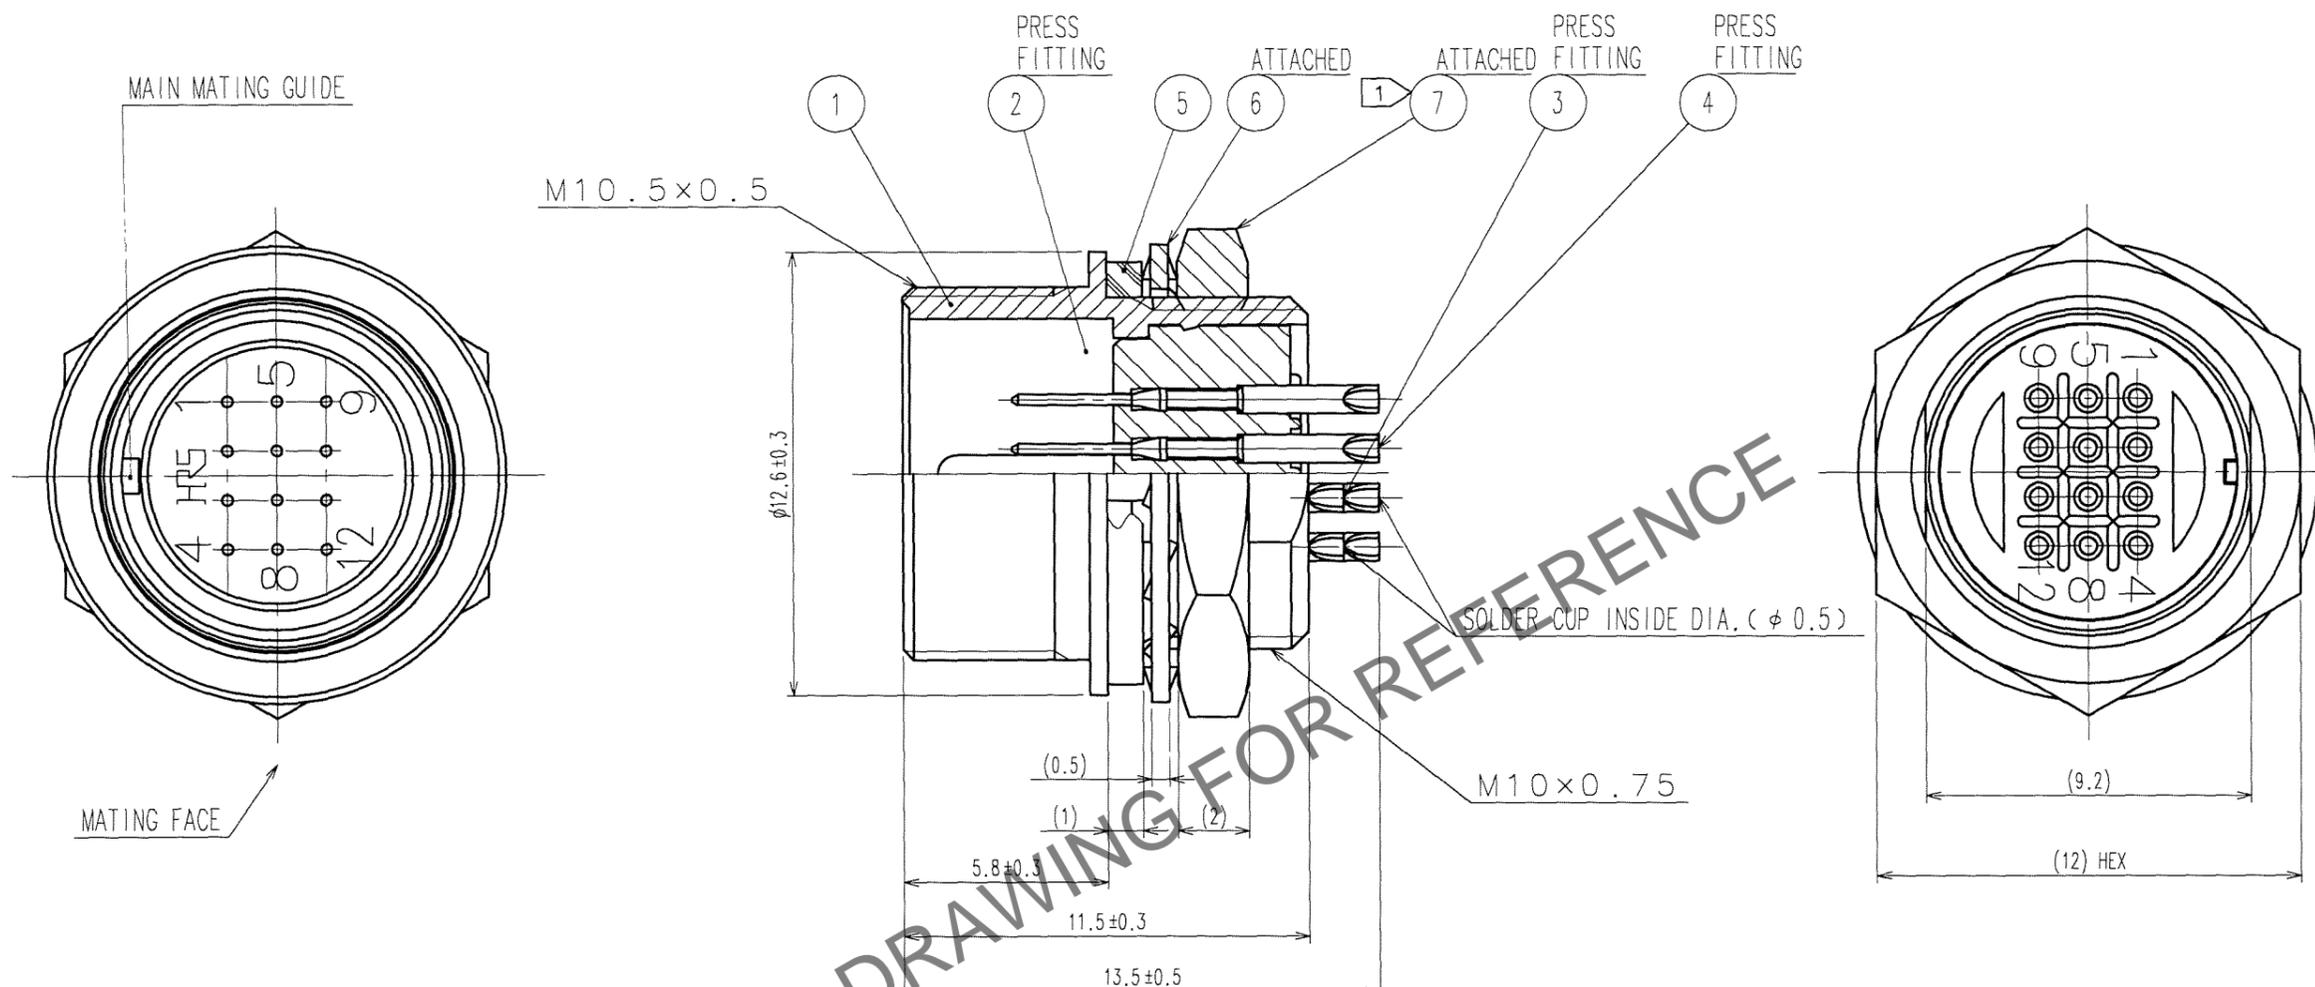

HRS DRAWING FOR REFERENCE

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑦ TO BE 1.5 N·m.
 COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT LOOSENESS.
 ② OVER PLATING: GOLD 0.2μm min.
 UNDER PLATING: NICKEL 2μm min.

4	PHOSPHOR BRONZE	②			
3	PHOSPHOR BRONZE	②	7	BRASS ①	NICKEL PLATING
2	POLYPHENYLENE SULFIDE (BLACK)	UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	ETHYLENE PROPYLENE RUBBER (BLACK)	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		M.SATO	H.KAWASHIMA	Y.YAMADA	E.KUNII	
		'07 04 09	'07 04 10	'07 04 10	'07 04 10	

SCALE	DRAWING NO.	PART NO.
5 : 1	EDC3-110166-71	HR25-9TR-12P(71)
UNITS	HIROSE ELECTRIC CO., LTD	CODE NO.
mm	HRS	CL125-0108-1-71

TO
R

1/1