
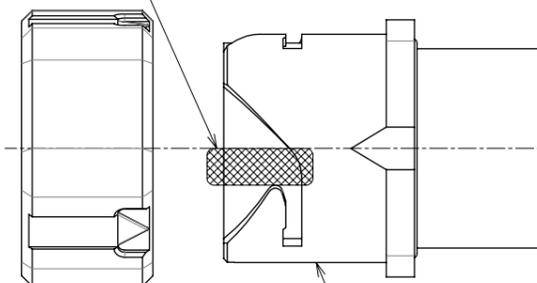
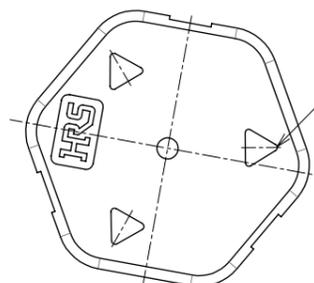


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

How to attach the cap




Before attachment

Align the ∇ mark on the top surface of the cap to the  area shown below. Positional relationship of the ∇ mark on the top surface of the cap and the receptacle shows an example.


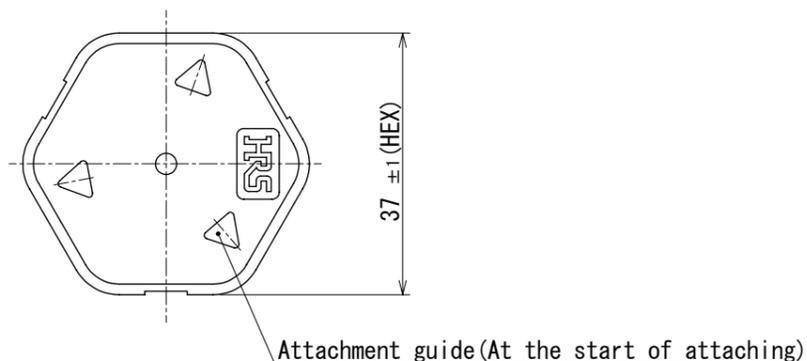


Attachment completed

Applicable connectors
HR41-25WBR*-PC(**) or HR41-25WBJ*-PC(**)

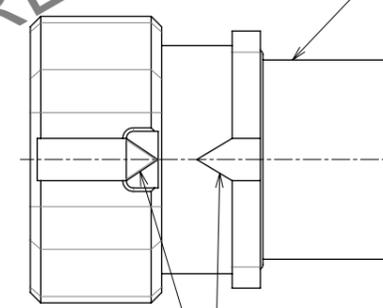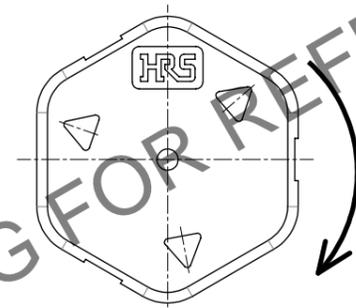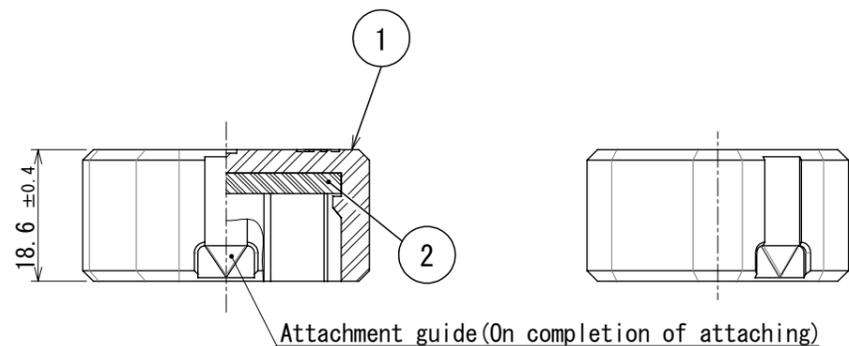

Removal

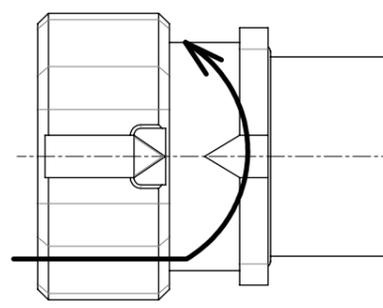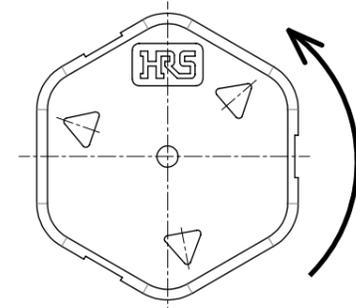

HRS DRAWING FOR REFERENCE

Note 1 When the silicone rubber comes away, remove the possible contamination attached to the silicone rubber surface for cleaning. Then, attach the silicone rubber to the cap for reuse.

 CAD change

1	Polyamide	(Black) UL94V-0	2	Silicone rubber	(Red)			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		1:1	1	DIS-C-00018422		KN. IKEHARA	TP. KOMATSU	2024. 10. 07
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA	2013. 01. 31	DRAWING NO.		EDC-118050-00-00		
		CHECKED : HY. KOBAYASHI	2013. 01. 31	PART NO.		HR41-25WBR-C		
		DESIGNED : YS. SAKODA	2013. 01. 22	CODE NO.		CL0141-0022-7-00		
		DRAWN : YS. SAKODA	2013. 01. 22					