


## VPU AC II O 300/50 Y

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

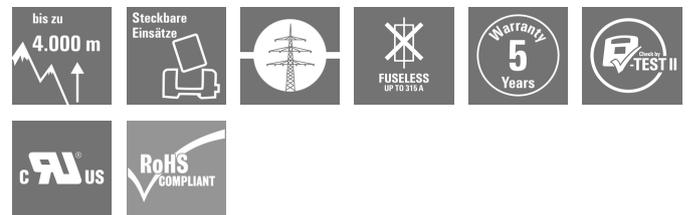

In the event of a defective arrester, you can easily reorder this spare arrester, replace the defective arrester and thus restore protection.

### General ordering data

Version	Spare arrester, Surge protection, TN, Single-phase
Order No.	<a href="#">2659840000</a>
Type	VPU AC II O 300/50 Y
GTIN (EAN)	4050118679403
Qty.	1 pc(s).

## VPU AC II O 300/50 Y

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	64 mm	Depth (inches)	2.52 inch
Height	45 mm	Height (inches)	1.772 inch
Width	18 mm	Width (inches)	0.709 inch
Net weight	65 g		

### Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

### Rated data UL

Ambient temperature (operational), max. 85 °C		Rated Voltage $U_N$	240 V
VPR (L/N-PE)	900 V	MCOV (L/N-PE)	300 V
SCCR	150 kA	$I_n$	20 kA
Category	SPD TYPE 1CA	Ambient temperature (operational), min. -40 °C	
Certificate No. (cURus)	E354261	VPR (L-PE)	900 V
Voltage type	AC		

### General data

Number of poles	1	Protection degree	IP20 in installed state
Colour	blue		

### Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

### Rated data IEC / EN

Combined pulse $U_{OC}$	6 kV	Discharge current (type III)	3 kA
Discharge current $I_{max}$ (8/20 $\mu$ s) N-PE	50 kA	Discharge current $I_n$ (8/20 $\mu$ s) N-PE	25 kA
Energy coordination ( $\leq 10$ m)	Type II, Type III	Frequency range, max.	60 Hz
Frequency range, min.	50 Hz	Integrated back-up fuse	No
Leakage current at $U_n$	0.3 mA	Low voltage network	TN, Single-phase
Max. continuous voltage, $U_c$ (AC)	300 V	Max. continuous voltage, $U_c$ (N-PE)	300 V
Number of poles	1	Protection level $U_p$ at $I_N$ (L/N-PE)	$\leq 1.3$ kV
Rated voltage (AC)	230 V	Requirements category acc. to IEC 61643-11	Type II, Type III
Requirements class, acc. to EN 61643-11	T2, T3	Response time	$\leq 25$ ns
SPD type	T2	Short-circuit current rating $I_{SCCR}$	0.1 kA
Standards	IEC61643-11, EN61643-11, UL 1449	Temporary surge voltage (over-voltage) - TOV	1,200 V
Voltage type	AC		

### Connection data

Type of connection	Plug-in connection
--------------------	--------------------

### Electrical data

Voltage type	AC
--------------	----

Creation date June 16, 2025 6:06:54 PM CEST

## VPU AC II 0 300/50 Y

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Guarantee

Time interval 5 years

## Classifications

ETIM 7.0	EC000941	ETIM 8.0	EC000941
ETIM 9.0	EC000941	ETIM 10.0	EC000941
ECLASS 12.0	27-17-12-02	ECLASS 13.0	27-17-12-02
ECLASS 14.0	27-17-12-02	ECLASS 15.0	27-17-12-02

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Approvals

Approvals



Approvals MAMID	<a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/</a> <a href="https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/">https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/</a>
ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E354261

## Downloads

Approval/Certificate/Document of Conformity	<a href="#">EU Konformitätserklärung / EU Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Tender specification	<a href="#">Ausschreibungstext DE</a> <a href="#">Tenderspecification EN</a>
User Documentation	<a href="#">Beipackzettel / Instruction sheet</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>


**VPU AC II O 300/50 Y**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Electric symbol**

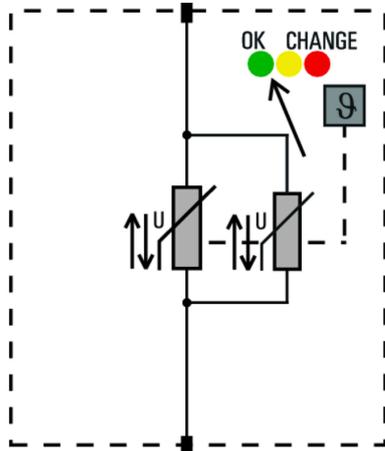

Schematic circuit diagram

## VPU AC II 0 300/50 Y

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## VPU Series




Extensive accessories round off the product range

## General ordering data

Type	VPU LOCKING CLIP S
Order No.	<a href="#">2735080000</a>
GTIN (EAN)	4050118826050
Qty.	10 pc(s).

## Slotted screwdriver

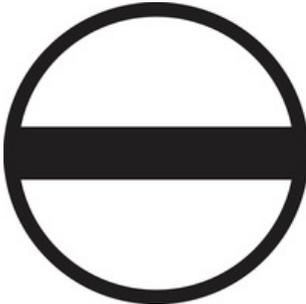

VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

## General ordering data

Type	SDIS 1.0X5.5X125	Version
Order No.	<a href="#">2749850000</a>	Screwdriver, Blade width (B): 5.5 mm, Blade length: 125 mm, Blade thickness (A): 1 mm
GTIN (EAN)	4050118897050	
Qty.	1 pc(s).	

## VPU AC II 0 300/50 Y

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc. Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Type	ESG 6/15 K MC NE WS	Version
Order No.	<a href="#">1880100000</a>	ESG, Device markers x 15 mm, PA 66, Colour: white, Self-adhesive
GTIN (EAN)	4032248478781	
Qty.	200 pc(s).	