



| SPECIFICATIONS             |            |             |
|----------------------------|------------|-------------|
| PARAMETERS                 | VALUES     | UNITS       |
| RATED VOLTAGE              | 12         | Vdc         |
| OPERATING VOLTAGE RANGE    | 7 ~ 24     | Vdc         |
| RATED CURRENT (MAX)        | 350        | mA          |
| MINIMUM SPL @ 10 CM (1KHz) | 100        | dBA         |
| RESONANT FREQUENCY         | 100 ~ 6000 | Hz          |
| TONE OR PULSE RATE         | REPEATING  | 0 pulse/sec |
| OPERATING TEMPERATURE      | -20 ~ +60  | °C          |
| STORAGE TEMPERATURE        | -30 ~ +70  | °C          |
| HOUSING MATERIAL           | ABS        | -           |
| TERMINAL MATERIAL          | LEAD WIRE  | -           |
| WEIGHT                     | 30         | grams       |

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.  
©2003, Projects Unlimited Inc.

| REVISION HISTORY |                                       |           |          |
|------------------|---------------------------------------|-----------|----------|
| LTR              | DESCRIPTION                           | DATE      | APPROVED |
| -                | RELEASED FROM ENGINEERING             | 1/6/2011  |          |
| A                | UPDATED NOTE 4 DUE TO MEMORY INCREASE | 3/15/2016 | B.R.     |
| B                | ADDED NOTE TO SHOW USB COMPATIBILITY  | 9/15/2017 | M.V.     |

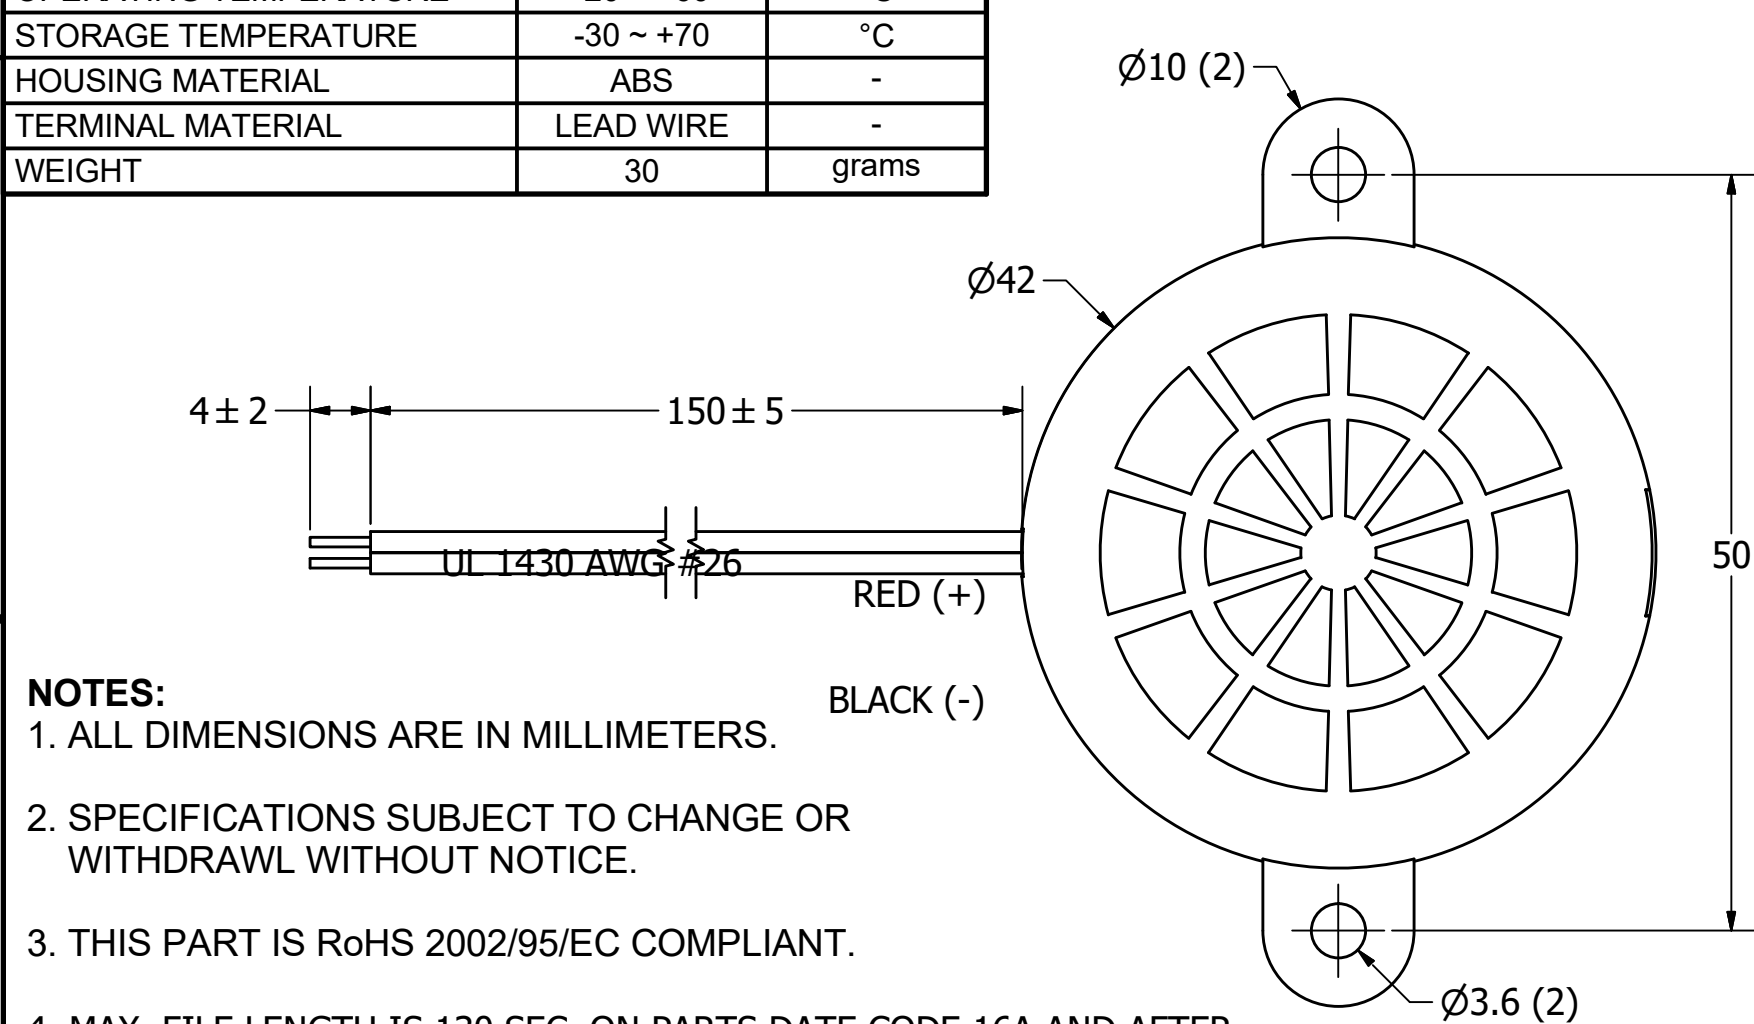

- NOTES:**
1. ALL DIMENSIONS ARE IN MILLIMETERS.
  2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
  3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
  4. MAX. FILE LENGTH IS 130 SEC. ON PARTS DATE CODE 16A AND AFTER. PARTS DATE CODE 15L AND EARLIER HAVE 33 SEC. MAX FILE LENGTH
  5. CONTINUOUS TONES OF 2KHz AND ABOVE MAY SOUND DISTORTED DUE TO 12 kHz SAMPLING RATE.
  6. WORKS WITH WINDOWS 2000, XP, VISTA, WINDOWS 7, 8, AND 10.
  7. DESIGNED TO WORK WITH USB 1, 1.1, AND 2.0 PORTS. DOES NOT WORK WITH USB 3.0 (AND LATER) PORTS.
  8. OPTIONAL USB TO MINI USB CABLE: PUI PART# API-CABLE.
  9. PATENT PENDING, COMPLIES WITH FCC PART 15B, CLASS B AND EN 61000-6-3.

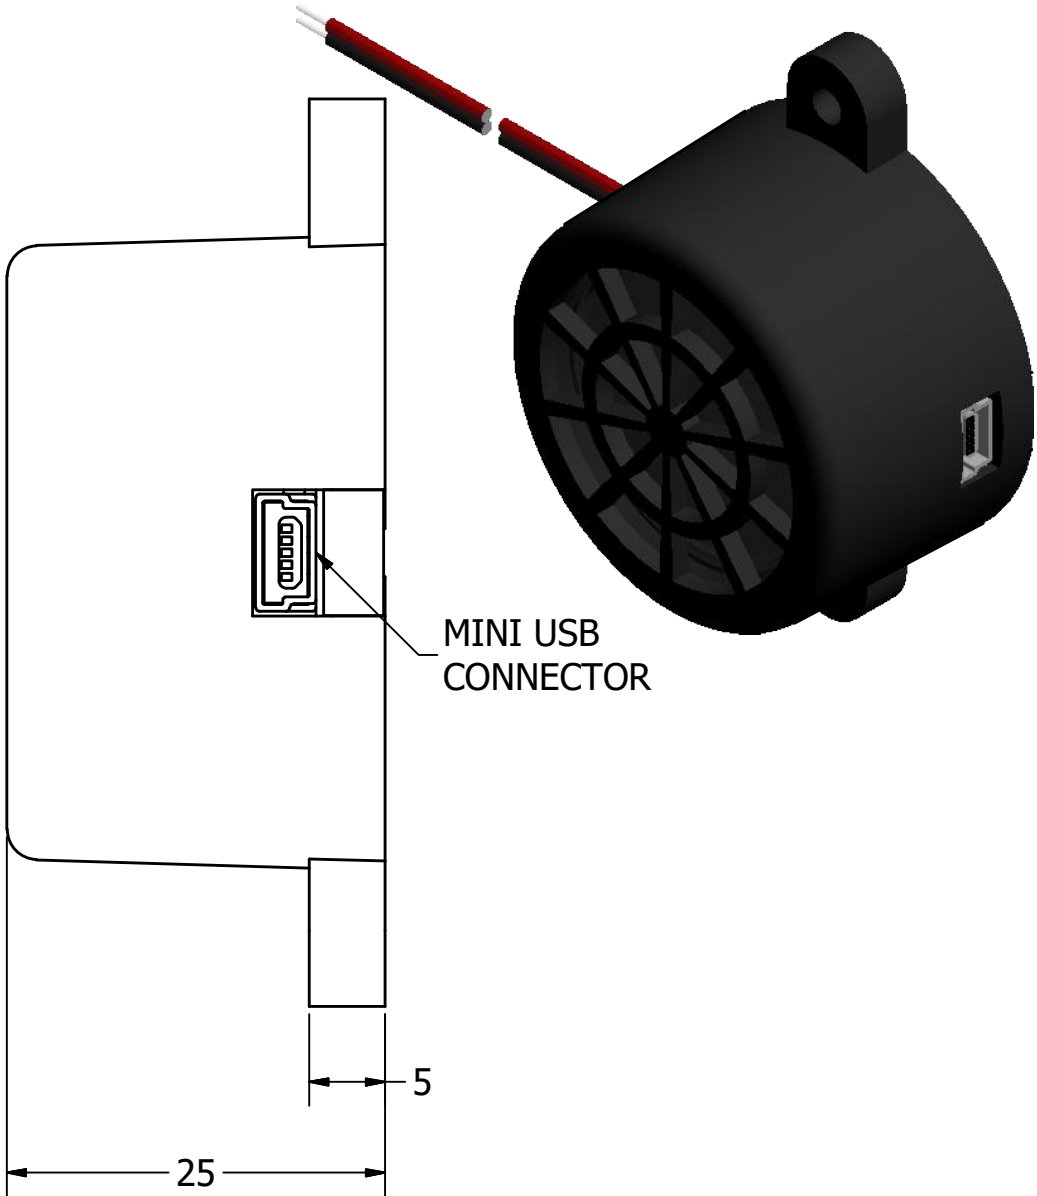

|  |   |             |          |            |                  |              |           |                |
|--|---|-------------|----------|------------|------------------|--------------|-----------|----------------|
| UNLESS OTHERWISE SPECIFIED:<br><br>DIMENSIONS ARE IN MILLIMETERS,<br><br>TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. | SIZE<br><br>A3  | Designed by | Date     | Checked by | Date             | Approved by  | Date      | Drawn Date     |
|  |   | J.D.        | 1/6/2011 | M.L.       | 3/29/2011        | B.R.         | 3/29/2011 | 1/6/2011       |
|  |  <b>pui audio</b> <sup>™</sup><br>a projects unlimited company |             |          |            | API-4260-LW150-R |              |           |                |
| API-4260-LW150-R.idw   |   | Indicator   |          |            |                  | Edition<br>- |           | Sheet<br>1 / 1 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[API-4260-LW150-R](#)