



AMP 4805 REV 3IMAR2000

Pro/ENGINEER DRAWING

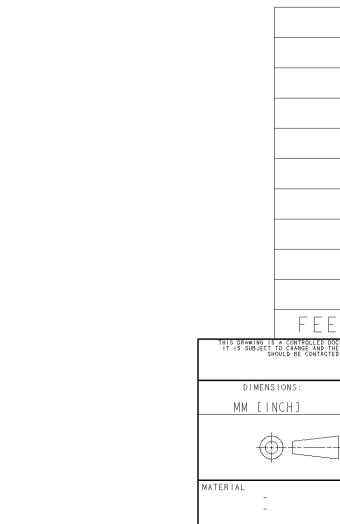



| | 2 | | | | | | | |
|-----|------|-----------|-----|----------------------|--|-----------|-----|------|
| LOC | DIST | REVISIONS | | | | | | |
| ΗМ | 00 | P | LTR | DESCRIPTION | | DATE | DWN | APVD |
| | | | A | RLSD - NPR NSD04-059 | | 29JUN04 | GG | MD |
| | | | В | REV; EC 0B60-0118-04 | | 28DEC2004 | GG | MD |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

CABLE ASSEMBLY SHALL BE WIRED PER WIRING DIAGRAM.
2. FINAL ASSEMBLY SHALL BE 568B COMPLIANT.

D

С

В

- \bigcirc probe pins are connected by 9th wire in Cable.
- 4 dimensions are maximum.
- CABLE OUTSIDE DIAMETER IS 6.7 MM NOMINAL AND FOR REFERENCE ONLY.
- PROTECTIVE CAPS TO BE REMOVED PRIOR TO MATING WITH MODULAR JACK, SHIPPED WITH CAPS INSTALLED.

8 POSITION MODULAR PLUG 2 REQUIRED

| 25 | 7874.0 [310.00] | 2-1435953-5 |
|---|---|---------------------------------|
| 16 | 5 30.8 [202.00] | - 435953-6 |
| 4 | 4521.2 [178.00] | - 435953-4 |
| 0 | 3251.2 [128.00] | - 435953-0 |
| 9 | 2895.6 [4.00] | 4 3 5 9 5 3 - 9 |
| 7 | 2286.0 [90.00] | 4 3 5 9 5 3 - 7 |
| 5 | 676.4 [66.00] | 4 3 5 9 5 3 - 5 |
| 4 | 37 .6 [54.00] | 4 3 5 9 5 3 - 4 |
| 3 | 1066.8 [42.00] | 4 3 5 9 5 3 - 3 |
| 2 | 762.0 [30.00] | 4 3 5 9 5 3 - 2 |
| ET, REF | A 4 | PART NO. |
| OCUMENT FOR TICO ELECTRONICS CC HE CONTROLLING ENGINEERING ORG/ ED FOR THE LATEST REVISION. | CHK 29JUN04 Electronics Harrisbu | ctronics rg, Pa., 17105-3608 |
| TOLERANCES UNL OTHERWISE SPECI 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- | APVD 29JUN04 NAME PATCH CORD ASSEMBL PRODUCT SPEC CATEGORY 6, NON A Application spec RED, W/BLACK | -PLENUM, BOOTS |
| 4 PLC ±- ANGLES : FINISH - - | E A CLUSTOMED DRAWLING | RESTRICTED TO |
| | CUSTOMER DRAWING 2: | SHEET OF REV |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity Divested: <u>1-1435953-0</u>