

NOTES:

1. MATERIALS AND FINISHES

BODY - BRASS, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM, NOMINAL
B. FREQUENCY RANGE: DC-6 GHz
C. VSWR (RETURN LOSS): 1.100 (-26.4 dB) MAX. @ 0-2.5 GHz
D. D.W.V: 1000 VRMS, MIN.


3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -55°C TO +155°C



THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
C	RELEASE TO MFG.	20-Aug-14	2794	MZ/BCG



SCALE 3.000

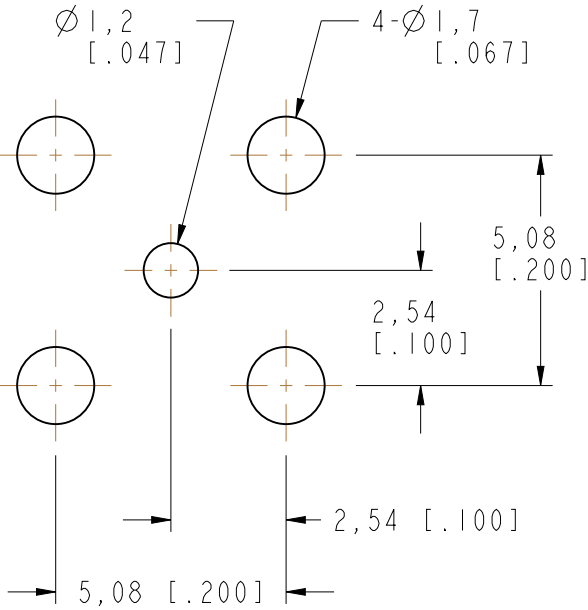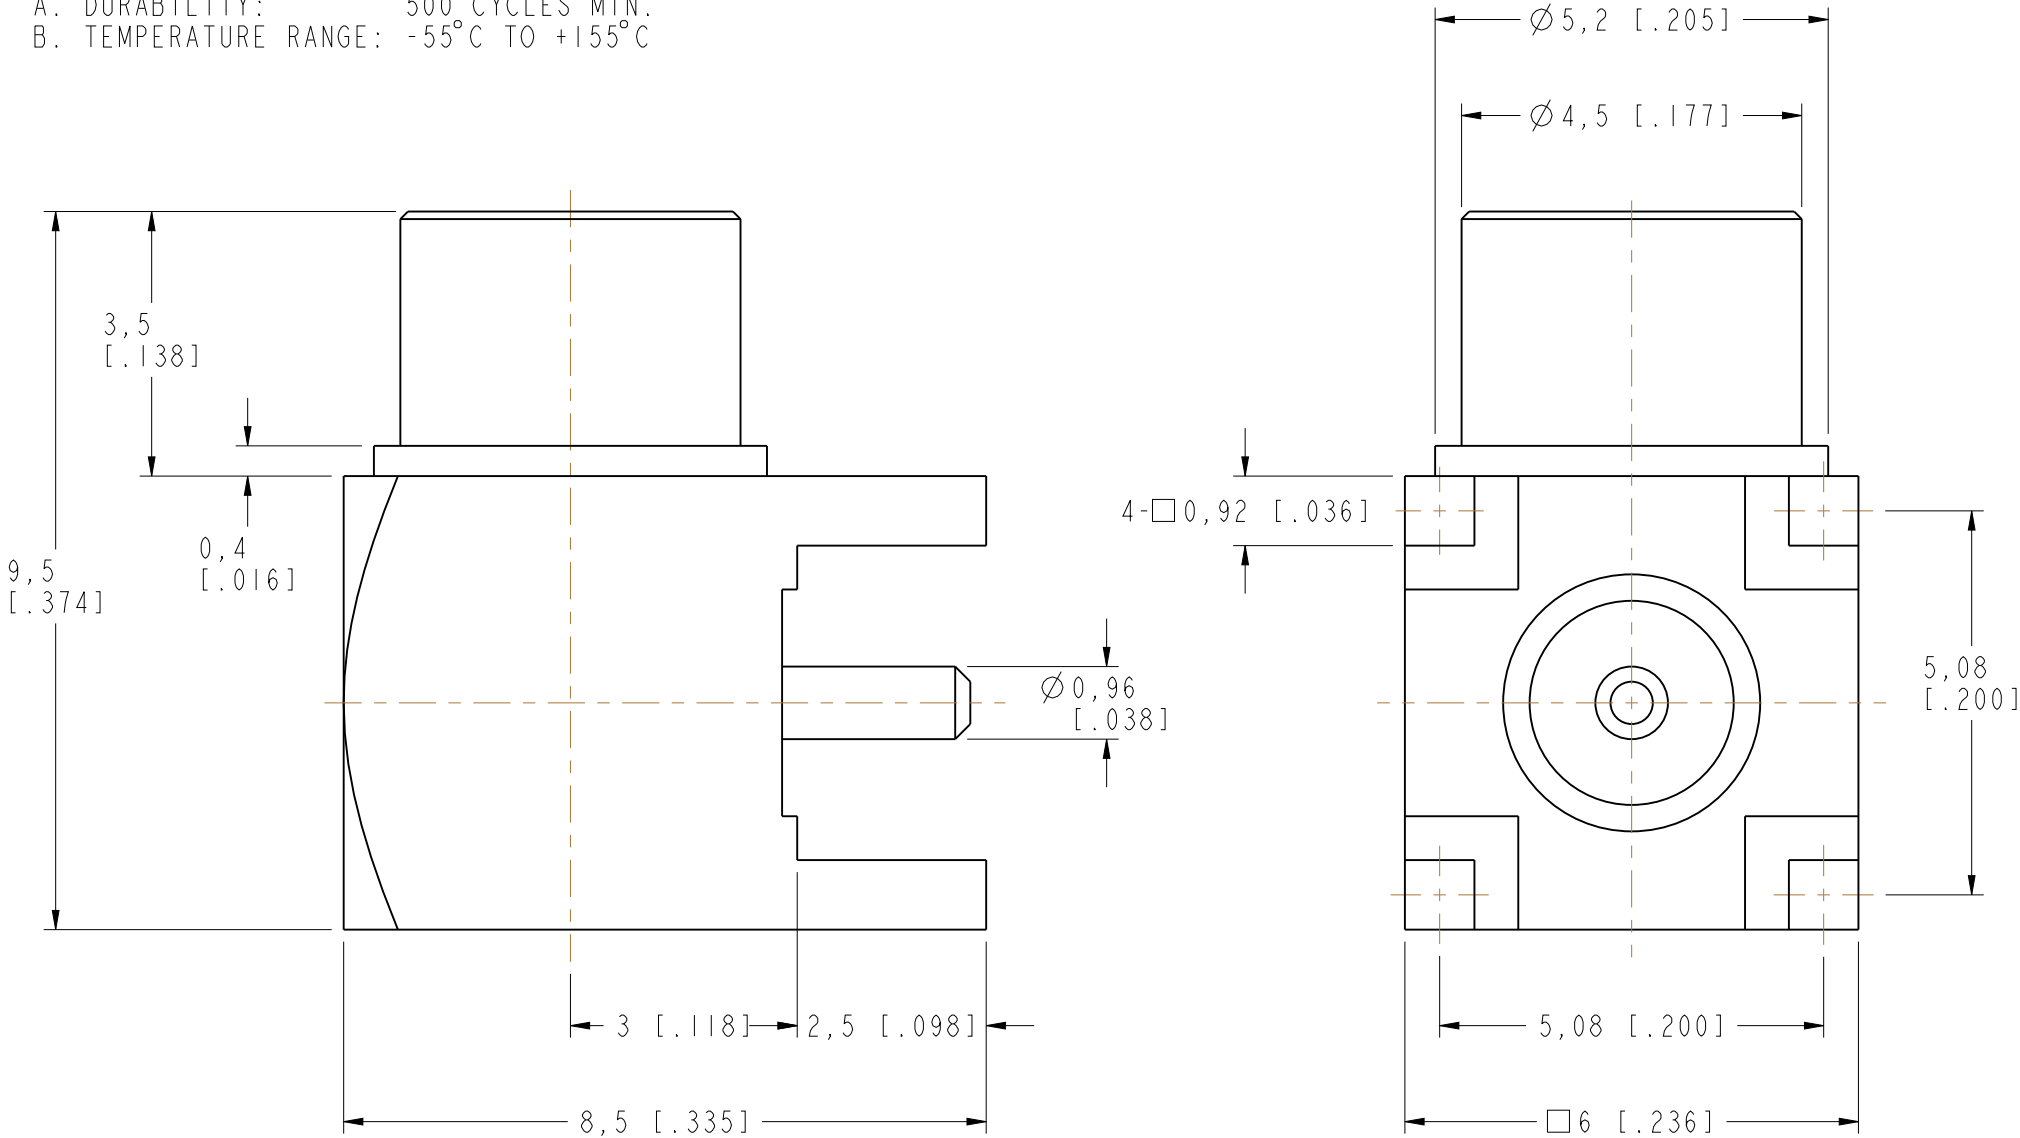

PCB MOUNTING HOLE

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL -	DRAWN M.ZHANG	DATE 20-Aug-14	TITLE MCX R/A P.C. BOARD RECEPT. JACK		Amphenol Connex	
		ENGINEER H.HE	DATE 20-Aug-14				
	REFERENCE MCX6252BI-016-3GT30G-50	APPROVED S.HSIEH	DATE 20-Aug-14	SCALE: 10.0:1.0	SHEET 3 OF 3	DRAWING NO.	
	CONFIGURATION LEVEL:	CAD FILE	DWG SIZE B	REV C	ITEM NO.		
	FINISH				PART NO. 252220		

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[252220](#)